



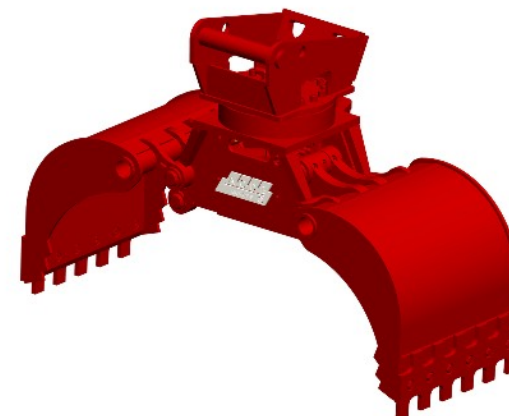

AMG-SERIE

Multi Grapple | Multigreifer




for Excavators from 1.2 ~ 35 t | für Bagger mit 1.2 ~ 35 t

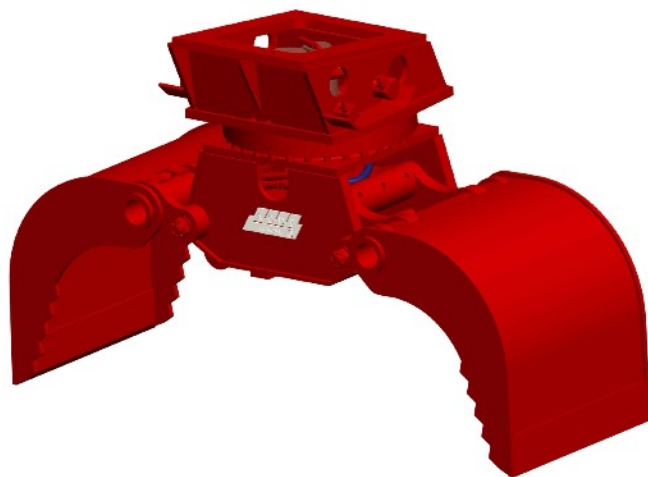

AMG-SERIE

Multi Grapple | Multigreifer

for Excavators from 1.2 ~ 35 t | für Bagger mit 1.2 ~ 35 t

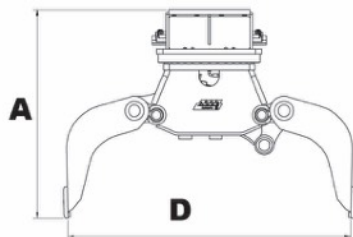

			A/A1	B	C	D									
	1*)	2*)					7*)	8*)	9*)	10*)	11*)	12*)	13*)	14*)	15*)
	Kg	t	mm	mm	mm	mm	kN	°	l/min/max	bar/ min-max	l/min/max	bar	ltr	AC	
AMG-160-370	174	1.2-3	670	550	370	800	15	360	10	170 - 210	25	300	160	AC03	M16
AMG-280-400	275	3-4	770	780	400	1160	20	360	10	170 - 210	35	300	250	AC03	M16
AMG-280-500	310	3-5	770	780	500	1160	20	360	10	170 - 210	35	300	260	AC03	M16
AMG-460-500	380	4-6	880	850	500	1400	23	360	12	190 - 210	40	300	335	AC05	M16
AMG-500-600	430	5-8	930	885	600	1500	24	360	12	190 - 210	50	300	450	AC05	M16
AMG-600-500	480	6-11	1055	885	500	1550	24	360	15	190-210	70	320	440	AC05	M16
AMG-600-600	505	6-11	1055	885	600	1550	24	360	15	190 - 210	70	320	455	AC05	M16
AMG-600-700	525	6-11	1055	885	700	1550	24	360	15	190 - 210	70	320	465	AC05	M16
AMG-700-600	650	6-11	1100	1050	600	1800	30	360	15	190-210	90	350	580	AC08	M20
AMG-800-600	820	7-12	1160	1070	600	1800	35	360	25	190-210	100	350	760	AC08	M20
AMG-800-700	850	7-12	1160	1070	700	1800	35	360	25	190-210	120	350	800	AC08	M20
AMG-1000-600	995	12-20	1245	1170	600	1950	46	360	25	190-210	120	350	1015	AC09	M30
AMG-1000-700	1030	12-20	1245	1170	700	1950	46	360	25	190-210	120	350	1065	AC09	M30
AMG-1500-800	1420	17-28	1440	1300	800	2100	68	360	35	190-210	170	350	1380	AC09	M30
AMG-1500-900	1510	17-28	1440	1300	900	2100	68	360	35	190-210	170	350	1440	AC09	M30
AMG-2100-1200	1940	24-35	1510	1350	1200	260	80	360	35	190-210	170	350	1800	AC10	M30

1*) WEIGHT, without bracket / GEWICHT ohne Kopfplatte | 2*) APPLICABLE EXCAVATOR / GEEIGNETER BAGGER | 7*) PINCHING FORCE / KNEIFKRAFT | 8*) ROTATION / ROTATION | 9*) Oil Flow Rotation / Ölfluss Rotation | 10*) Oil PRESSURE Rotation / Öldruck Rotation | 11*) WORKING OIL FLOW / ÖLFLUSS | 12*) SET PRESSURE / EINSTELLD RUCK | 13*) VOLUME/ INHALT | 14*) HOLE PATTERN / LOCHMUSTER | 15*) BOLT SIZE / SCHRAUBENGROSSE




AMG-ND-SERIE

Rigid Multi Grapple | Starre Multigreifer
for Excavators from 1.2 ~ 35 t | für Bagger mit 1.2 ~ 35 t






Members of:

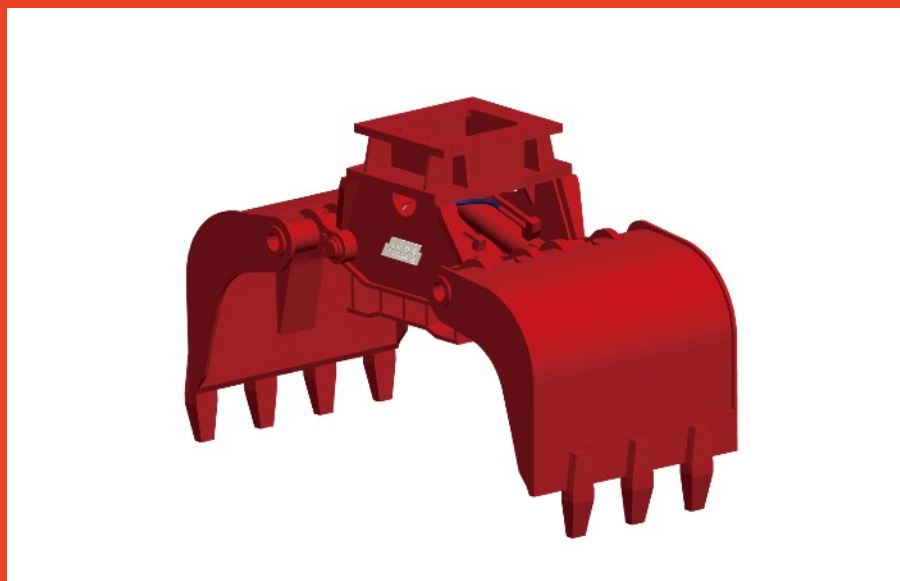

AMG-ND-SERIE

Rigid Multi Grapple | Starre Multigreifer

for Excavators from 1.2 ~ 35 t | für Bagger mit 1.2 ~ 35 t

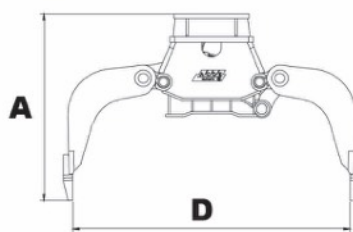

			A/A1	B	C	D						
	1*)	2*)	-	-	-	-	7*)	11*)	12*)	13*)	14*)	15*)
	Kg	t	mm	mm	mm	mm	kN	l/min/max	bar	ltr	AC	
AMG-160-ND-370	95	1.2-3	700	550	370	800	15	25	300	58	AC03	M16
AMG-280-ND-400	190	2.5-4	850	780	400	1160	20	35	300	80	AC03	M16
AMG-280-ND-500	210	2.5-5	850	780	500	1160	20	35	300	100	AC03	M16
AMG-460-ND-500	280	4-6	950	850	500	1400	23	40	300	125	AC05	M16
AMG-500-ND-600	330	5-8	1000	885	600	1500	24	50	300	170	AC05	M16
AMG-600-ND-500	355	6-11	1100	885	500	1550	24	70	320	140	AC05	M16
AMG-600-ND-600	370	6-11	1100	885	600	1550	24	70	320	170	AC05	M16
AMG-600-ND-700	385	6-11	1100	885	700	1550	24	70	320	200	AC05	M16
AMG-700-ND-600	580	6-11	1100	1050	600	1800	30	90	350	300	AC08	M20
AMG-800-ND-600	560	7-12	1160	1070	600	1800	35	100	350	300	AC08	M20
AMG-800-ND-700	580	7-12	1160	1070	700	1800	35	120	350	350	AC08	M20
AMG-ND-1000-600	770	12-20	1245	1170	600	1950	46	120	350	380	AC09	M30
AMG-ND-1000-700	795	12-20	1300	1170	700	1950	46	120	350	440	AC09	M30
AMG-ND-1500-800	1160	17-28	1500	1300	800	2100	68	170	350	640	AC09	M30
AMG-ND-1500-900	1200	17-28	1500	1300	900	2100	68	170	350	720	AC09	M30
AMG-ND-2100-1200	1450	24-35	1510	1350	1200	2250	80	170	350	950	AC10	M30

1*) WEIGHT, without bracket / GEWICHT ohne Kopfplatte | 2*) APPLICABLE EXCAVATOR / GEEIGNETER BAGGER | 7*) PINCHING FORCE / KNEIFKRAFT | 8*) ROTATION / ROTATION | 9*) Oil Flow Rotation / Ölfluss Rotation | 10*) Oil PRESSURE Rotation / Öldruck Rotation | 11*) WORKING OIL FLOW / ÖLFLUSS | 12*) SET PRESSURE / EINSTELLD RUCK | 13*) VOLUME/ INHALT | 14*) HOLE PATTERN / LOCHMUSTER | 15*) BOLT SIZE / SCHRAUBENGROSSE



Datenblätter - für jedes Model verfügbar

Specificationsheet - available for all models



ACDE EUROPE
+41 62 5880164
info@acde-europe.com
www.acde-europe.com

ADVANCED CONSTRUCTION & DEMOLITION EQUIPMENT

Sloop-en sorteergriper
Demolition and sorting grab
Abbruch- und sortiergreifer
Grappin de demolition et de triage

ASG-500
AC05 hole pattern

zijkant/side view/
Sellenansicht/vue de côté

vooraansicht/front view/
Vorderansicht/vue de face

Gatenpatroon/hole pattern/
Bohrbild/motif de trous

Technical specifications

Nederlands	English	Deutsch	Français	ASG-500
Klasse graafmachine	Class excavator	Machine klasse	Classe de excavatrice	ton 5-5
Gewicht	Weight	Gewicht	Poids	kg 440
Werkdruk max	Op. pressure max	Betdr. druck max	Pression maximale	bar 300
Werkdruk rotatie max	Op. pressure rotation max	Betdr. druck rotation max	Pression rotation max	bar 210
Werkdruk rotatie min	Op. pressure rotation min	Betdr. druck rotation min	Pression rotation min	bar 190
Olieflow max	Oil flow max	Ölflu max	Débit d'huile max	l/min 30
Olieflow rotatie max	Oil flow rotation max	Ölflu rotation max	Débit d'huile rotation max	l/min 12
Inhoud	Content	Inhalt	Contenance	l 250
Sluitkracht	Closing force	Schließkraft	Force de fermeture	kn 24
Bergingsklinging trijgfunctie	Hose connect open/close	Schlauchanschluss knallen	Raccord de tuyau fermeture	BSF 12
Bergingsklinging draaifunctie	Hose connect turn function	Schlauchanschluss drehen	Raccord de tuyau rotation	BSF 10

ACDE EUROPE
+41 62 5880164
info@acde-europe.com
www.acde-europe.com

ADVANCED CONSTRUCTION & DEMOLITION EQUIPMENT

Sloop-en sorteergriper
Demolition and sorting grab
Abbruch- und sortiergreifer
Grappin de demolition et de triage

ASG-1000
AC09 hole pattern

zijkant/side view/
Sellenansicht/vue de côté

vooraansicht/front view/
Vorderansicht/vue de face

Gatenpatroon/hole pattern/
Bohrbild/motif de trous

Technical specifications

Nederlands	English	Deutsch	Français	ASG-1000
Klasse graafmachine	Class excavator	Machine klasse	Classe de excavatrice	ton 12-20
Gewicht	Weight	Gewicht	Poids	kg 1000
Werkdruk max	Op. pressure max	Betdr. druck max	Pression maximale	bar 300
Werkdruk rotatie max	Op. pressure rotation max	Betdr. druck rotation max	Pression rotation max	bar 210
Werkdruk rotatie min	Op. pressure rotation min	Betdr. druck rotation min	Pression rotation min	bar 190
Olieflow max	Oil flow max	Ölflu max	Débit d'huile max	l/min 120
Olieflow rotatie max	Oil flow rotation max	Ölflu rotation max	Débit d'huile rotation max	l/min 21
Inhoud	Content	Inhalt	Contenance	l 300
Sluitkracht	Closing force	Schließkraft	Force de fermeture	kn 41
Bergingsklinging trijgfunctie	Hose connect open/close	Schlauchanschluss knallen	Raccord de tuyau fermeture	BSF 14
Bergingsklinging draaifunctie	Hose connect turn function	Schlauchanschluss drehen	Raccord de tuyau rotation	BSF 12

ACDE EUROPE
+41 62 5880164
info@acde-europe.com
www.acde-europe.com

ADVANCED CONSTRUCTION & DEMOLITION EQUIPMENT

Sloop-en sorteergriper
Demolition and sorting grab
Abbruch- und sortiergreifer
Grappin de demolition et de triage

ASG-1500
AC09 hole pattern

zijkant/side view/
Sellenansicht/vue de côté

vooraansicht/front view/
Vorderansicht/vue de face

Gatenpatroon/hole pattern/
Bohrbild/motif de trous

Technical specifications

Nederlands	English	Deutsch	Français	ASG-1500
Klasse graafmachine	Class excavator	Machine klasse	Classe de excavatrice	ton 17-28
Gewicht	Weight	Gewicht	Poids	kg 1500
Werkdruk max	Op. pressure max	Betdr. druck max	Pression maximale	bar 300
Werkdruk rotatie max	Op. pressure rotation max	Betdr. druck rotation max	Pression rotation max	bar 210
Werkdruk rotatie min	Op. pressure rotation min	Betdr. druck rotation min	Pression rotation min	bar 190
Olieflow max	Oil flow max	Ölflu max	Débit d'huile max	l/min 120
Olieflow rotatie max	Oil flow rotation max	Ölflu rotation max	Débit d'huile rotation max	l/min 25
Inhoud	Content	Inhalt	Contenance	l 300
Sluitkracht	Closing force	Schließkraft	Force de fermeture	kn 44
Bergingsklinging trijgfunctie	Hose connect open/close	Schlauchanschluss knallen	Raccord de tuyau fermeture	BSF 14
Bergingsklinging draaifunctie	Hose connect turn function	Schlauchanschluss drehen	Raccord de tuyau rotation	BSF 12

ACDE EUROPE
+41 62 5880164
info@acde-europe.com
www.acde-europe.com

ADVANCED CONSTRUCTION & DEMOLITION EQUIPMENT

Sloop-en sorteergriper
Demolition and sorting grab
Abbruch- und sortiergreifer
Grappin de demolition et de triage

ASG-2900
AC10 hole pattern


zijkant/side view/
Sellenansicht/vue de côté

vooraansicht/front view/
Vorderansicht/vue de face

Gatenpatroon/hole pattern/
Bohrbild/motif de trous


Technical specifications

Nederlands	English	Deutsch	Français	ASG-2900
Klasse graafmachine	Class excavator	Machine klasse	Classe de excavatrice	ton 30-50
Gewicht	Weight	Gewicht	Poids	kg 2000
Werkdruk max	Op. pressure max	Betdr. druck max	Pression maximale	bar 300
Werkdruk rotatie max	Op. pressure rotation max	Betdr. druck rotation max	Pression rotation max	bar 210
Werkdruk rotatie min	Op. pressure rotation min	Betdr. druck rotation min	Pression rotation min	bar 190
Olieflow max	Oil flow max	Ölflu max	Débit d'huile max	l/min 200
Olieflow rotatie max	Oil flow rotation max	Ölflu rotation max	Débit d'huile rotation max	l/min 35
Inhoud	Content	Inhalt	Contenance	l 1000
Sluitkracht	Closing force	Schließkraft	Force de fermeture	kn 90
Bergingsklinging trijgfunctie	Hose connect open/close	Schlauchanschluss knallen	Raccord de tuyau fermeture	BSF G1
Bergingsklinging draaifunctie	Hose connect turn function	Schlauchanschluss drehen	Raccord de tuyau rotation	BSF G1/2

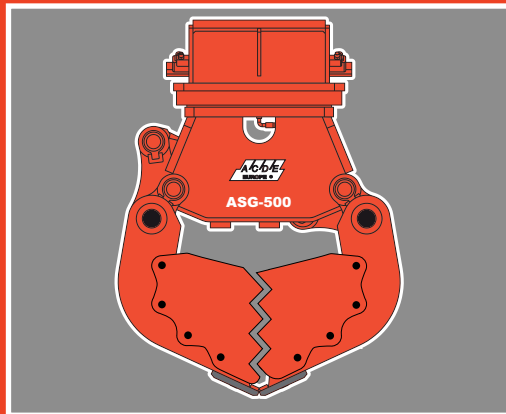


Anschaub Schilder 100% Brechzahn

Side bords - tooth 100%

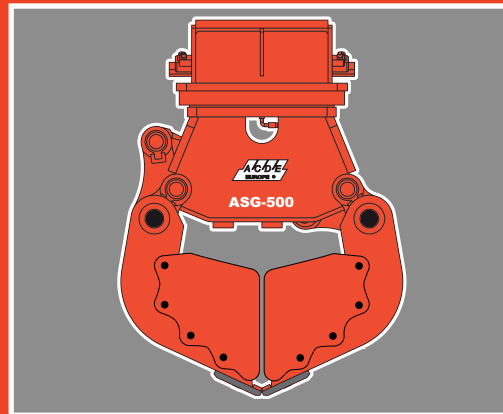


Anschaub Schilder 100% Glatt

Side bords - straight 100%

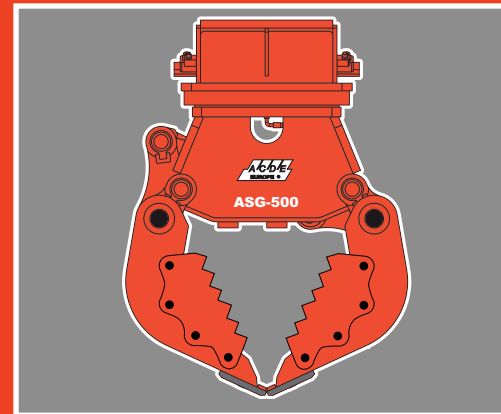

Anschaub Schilder 30% Brechzahn

Side bords - tooth 30%

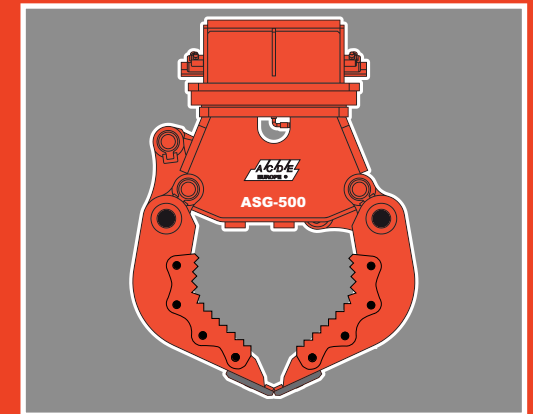

Anschaub Schilder Zahnreihe

Side bords - tooth