




ASB-SERIE

Rotating Log Grapple | Drehbare Baumgreifer

for Excavators from 1.5 ~ 50 t | für Bagger mit 1.5 ~ 50 t



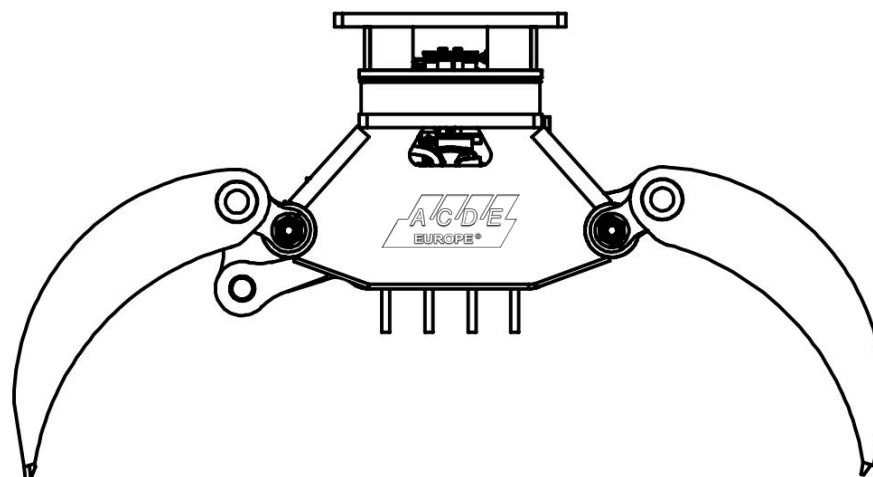


Member of



ASB-SERIE

Rotating Log Grapple | Drehbare Baumgreifer
for Excavators from 1.5 ~ 50 t | für Bagger mit 1.5 ~ 50 t

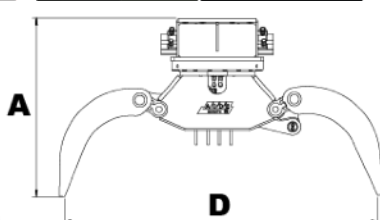

			A/A1	B	C	D									
	1*)	2*)	-	-	-	-	7*)	8*)	9*)	10*)	11*)	12*)	13*)	14*)	15*)
	Kg	t	mm	mm	mm	mm	kN	°	l/min/max	bar/ min-max	l/min/max	bar	ltr	AC	
ASB-160	160	1.5-3	765	450	400	1100	15	360	10	170-210	25	300	40	AC03	M16
ASB-280	260	3.5.5	780	450	400	1100	15	360	10	170-210	30	300	40	AC03	M16
ASB-460	400	4-8	850	565	500	1540	15	360	12	190-210	40	300	200	AC03	M16
ASB-500	440	5-8	863	565	500	1540	24	360	12	190-210	50	300	200	AC05	M16
ASB-600	500	7-11	995	565	500	1540	24	360	15	190-210	70	320	200	AC08	M20
ASB-800	865	10-16	1175	580	500	2050	35	360	25	190-210	100	350	200	AC09	M30
ASB-1000	1000	13-20	1160	735	635	2050	46	360	35	190-210	120	350	240	AC09	M30
ASB-1000-2M	1000	13-20	1160	735	635	2050	46	360	35	190-210	120	350	240	AC09	M30
ASB-1090	1100	16-24	1160	910	652	2050	46	360	35	190-210	120	350	300	AC09	M30
ASB-1090-2M	1100	16-24	1160	910	652	2050	46	360	35	190-210	120	350	300	AC09	M30
ASB-1500	1500	17-28	1460	910	810	2250	68	360	35	190-210	160	350	500	AC09	M30
ASB-1500-2M	1500	17-28	1460	910	810	2250	68	360	35	190-210	160	350	600	AC09	M30
ASB-1800	1600	20-28	1550	910	810	2250	68	360	35	190-210	160	350	600	AC09	M30
ASB-1800-2M	1600	20-28	1550	910	810	2250	68	360	35	190-210	160	350	600	AC09	M30
ASB-2300-2M	1800	25-38	1550	910	810	2250	78	360	35	210-350	160	350	600	AC10	M30
ASB-2700-2M	2900	30-50	1900	1200	1000	2850	90	360	35	210-350	200	350	800	AC10	M30



1*) WEIGHT, without bracket / GEWICHT ohne Kopfplatte | 2*) APPLICABLE EXCAVATOR / GEEIGNETER BAGGER | 7*) PINCHING FORCE / KNEIFKRAFT | 8*) ROTATION / ROTATION | 9*) Oil Flow Rotation / Ölfluss Rotation | 10*) Oil PRESSURE Rotation / Öldruck Rotation | 11*) WORKING OIL FLOW / ÖLFLUSS | 12*) SET PRESSURE / EINSTELLD RUCK | 13*) VOLUME/ INHALT | 14*) HOLE PATTERN / LOCHMUSTER | 15*) BOLT SIZE / SCHRAUBENGROSSE



ASB-ND-SERIE

Rigid Log Grapple | Starre Baumgreifer

for Excavators from 1.5 ~ 50 t | für Bagger mit 1.5 ~ 50 t

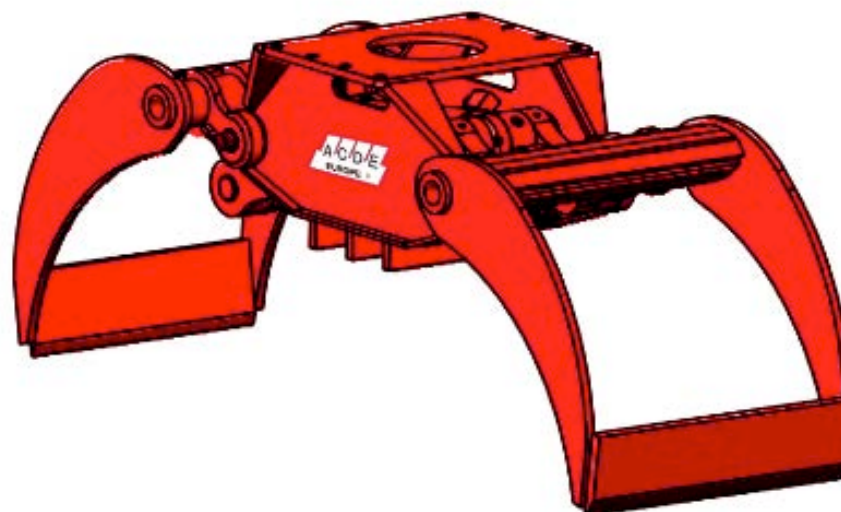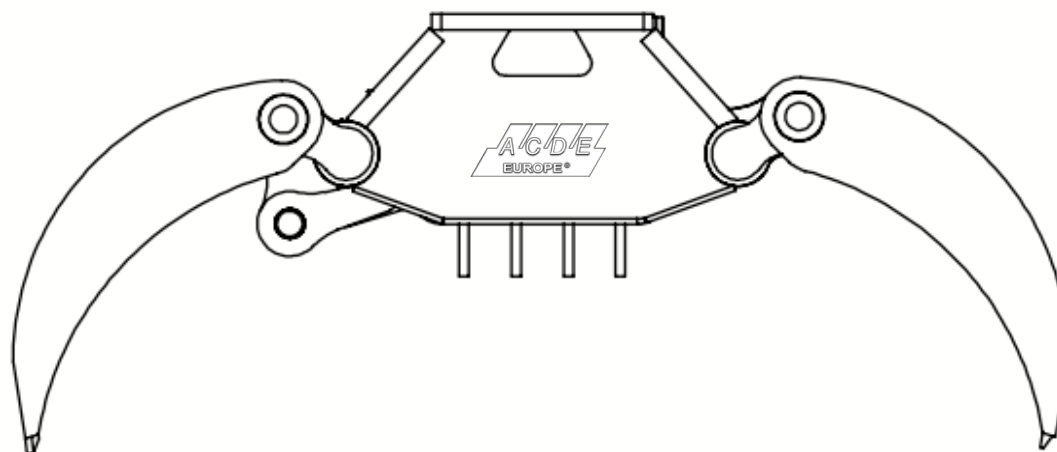

Member of





updated: 01-01-2026






OPEN



ASB-ND-SERIE

Rigid Log Grapple | Starre Baumgreifer

for Excavators from 1.5 ~ 50 t | für Bagger mit 1.5 ~ 50 t

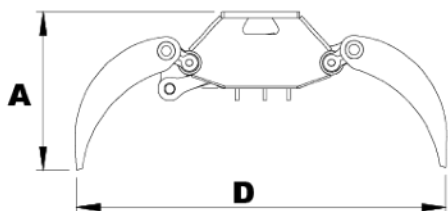

			A/A1	B	C	D						
	1*)	2*)	-	-	-	-	7*)	11*)	12*)	13*)	14*)	15*)
	Kg	t	mm	mm	mm	mm	kN	l/min/max	bar	ltr	AC	
ASB-160-ND	110	1.5-3	535	450	400	1100	15	25	300	40	AC03	M16
ASB-280-ND	160	3.5-5	535	450	400	1100	15	30	300	40	AC03	M16
ASB-460-ND	340	4-8	660	550	500	1540	24	40	300	200	AC03	M16
ASB-500-ND	340	5-8	660	550	500	1540	24	50	300	200	AC05	M16
ASB-600-ND	360	7-11	660	550	500	1540	35	100	320	200	AC08	M30
ASB-800-ND	590	10-16	820	580	500	2050	35	120	350	200	AC09	M30
ASB-1000-ND	720	13-20	850	735	635	2050	46	120	350	240	AC09	M30
ASB-1090-ND	760	16-24	850	910	652	2050	46	120	350	300	AC09	M30
ASB-1500-ND	1200	17-28	1100	910	810	2250	48	160	350	500	AC09	M30
ASB-1800-ND	1200	20-28	1100	910	810	2250	68	160	350	600	AC09	M30
ASB-2300-ND	1400	25-38	1320	910	810	2250	68	160	350	600	AC10	M30
ASB-2700-ND	2200	30-50	1550	1200	1000	2850	90	200	350	800	AC10	M30

1*) WEIGHT, without bracket / GEWICHT ohne Kopfplatte | 2*) APPLICABLE EXCAVATOR / GEEIGNETER BAGGER | 7*) PINCHING FORCE / KNEIFKRAFT | 8*) ROTATION / ROTATION | 9*) Oil Flow Rotation / Ölfluss Rotation | 10*) Oil PRESSURE Rotation / Öldruck Rotation | 11*) WORKING OIL FLOW / ÖLFLUSS | 12*) SET PRESSURE / EINSTELLD RUCK | 13*) VOLUME/ INHALT | 14*) HOLE PATTERN / LOCHMUSTER | 15*) BOLT SIZE / SCHRAUBENGROSSE



ASB-7T-SERIE

Rotating 7 Teeth Log Grapple | Drehbare 7 Zahn Baumgreifer

for Excavators from 1.5 ~ 38 t | für Bagger mit 1.5 ~ 38 t



Member of








updated: 01-01-2026



ASB-7T-SERIE

Rotating 7 Teeth Log Grapple | Drehbare 7 Zahn Baumgreifer
for Excavators from 1.5 ~ 38 t | für Bagger mit 1.5 ~ 38 t

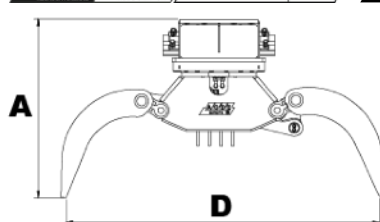


	1*)	2*)	-	-	-	-	7*)	8*)	9*)	10*)	11*)	12*)	13*)	14*)	15*)
	Kg	t	mm	mm	mm	mm	kN	°	l/min/max	bar/ min-max	l/min/max	bar	ltr	AC	
ASB-160-7T	170	1.5-3	680	450	330	1100	15	360	10	170-210	25	300	40	AC03	M16
ASB-280-7T	210	3.5-5	780	450	330	1100	15	360	10	170-210	30	300	40	AC03	M16
ASB-460-7T	390	4-8	850	735	500	1540	15	360	12	190-210	40	300	200	AC05	M16
ASB-500-7T	460	5-8	870	735	500	1540	24	360	12	190-210	50	300	200	AC05	M16
ASB-600-7T	550	6-11	1100	735	500	1540	24	360	15	190-210	70	350	200	AC08	M20
ASB-800-7T	900	10-16	1170	800	535	2050	35	360	25	190-210	100	350	175	AC09	M30
ASB-800-7T-2M	920	10-16	1170	800	535	2050	35	360	25	190-210	100	350	175	AC09	M30
ASB-1000-7T	1150	16-24	1160	910	682	2050	46	360	35	190-210	120	350	240	AC09	M30
ASB-1000-7T-2M	1170	16-24	1160	910	682	2050	46	360	35	190-210	120	350	240	AC09	M30
ASB-1500-7T	1700	17-28	1460	1230	840	2250	68	360	35	190-210	160	350	500	AC09	M30
ASB-1500-7T-2M	1730	17-28	1460	1230	840	2250	68	360	35	190-210	160	350	500	AC09	M30
ASB-2300-7T	2100	25-38	1550	1230	840	2250	78	360	35	190-210	170	350	500	AC10	M30

1*) WEIGHT, without bracket / GEWICHT ohne Kopfplatte | 2*) APPLICABLE EXCAVATOR / GEEIGNETER BAGGER | 7*) PINCHING FORCE / KNEIFKRAFT | 8*) ROTATION / ROTATION | 9*) Oil Flow Rotation / Ölfluss Rotation | 10*) Oil PRESSURE Rotation / Öldruck Rotation | 11*) WORKING OIL FLOW / ÖLFLUSS | 12*) SET PRESSURE / EINSTELLD RUCK | 13*) VOLUME/ INHALT | 14*) HOLE PATTERN / LOCHMUSTER | 15*) BOLT SIZE / SCHRAUBENGROSSE



ASB-7T-ND-SERIE

Rigid 7 Teeth Log Grapple | Starre 7 Zahn Baumgreifer
for Excavators from 1.5 ~ 38 t | für Bagger mit 1.5 ~ 38 t



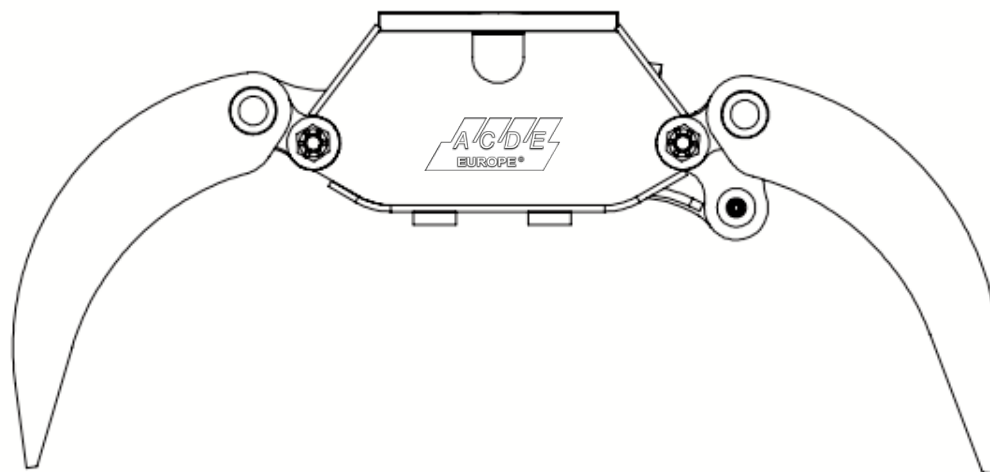


Member of



ASB-7T-ND-SERIE

Rigid 7 Teeth Log Grapple | Starre 7 Zahn Baumgreifer
for Excavators from 1.5 ~ 38 t | für Bagger mit 1.5 ~ 38 t

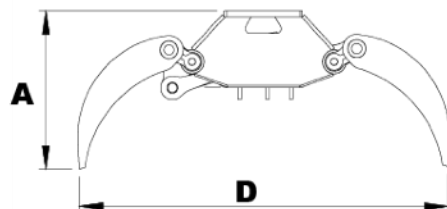

			A/A1	B	C	D						
	1*)	2*)	-	-	-	-	7*)	11*)	12*)	13*)	14*)	15*)
	Kg	t	mm	mm	mm	mm	kN	l/min/max	bar	ltr	AC	
ASB-160-7T-ND	110	1.5-3	500	450	330	1100	15	25	300	40	AC03	M16
ASB-280-7T-ND	160	3.5-5	535	450	330	1100	15	30	300	40	AC03	M16
ASB-460-7T-ND	340	4-8	660	735	500	1540	15	40	300	80	AC03	M16
ASB-500-7T-ND	340	5-8	660	735	500	1540	24	50	300	200	AC05	M16
ASB-600-7T-ND	360	6-11	660	735	500	1540	24	70	300	200	AC08	M20
ASB-800-7T-ND	680	10-16	820	800	535	2050	35	100	350	175	AC09	M30
ASB-1000-7T-ND	870	16-24	850	910	682	2050	46	120	350	240	AC09	M30
ASB-1500-7T-ND	1250	17-28	1100	1230	840	2250	68	160	350	500	AC09	M30
ASB-2300-7T-ND	1600	25-38	1320	1230	840	2250	78	170	350	500	AC10	M30

1*) WEIGHT, without bracket / GEWICHT ohne Kopfplatte | 2*) APPLICABLE EXCAVATOR / GEEIGNETER BAGGER | 7*) PINCHING FORCE / KNEIFKRAFT | 8*) ROTATION / ROTATION | 9*) Oil Flow Rotation / Ölfluss Rotation | 10*) Oil PRESSURE Rotation / Öldruck Rotation | 11*) WORKING OIL FLOW / ÖLFLUSS | 12*) SET PRESSURE / EINSTELLD RUCK | 13*) VOLUME/ INHALT | 14*) HOLE PATTERN / LOCHMUSTER | 15*) BOLT SIZE / SCHRAUBENGROSSE