
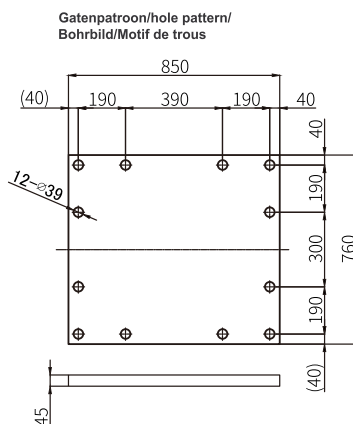


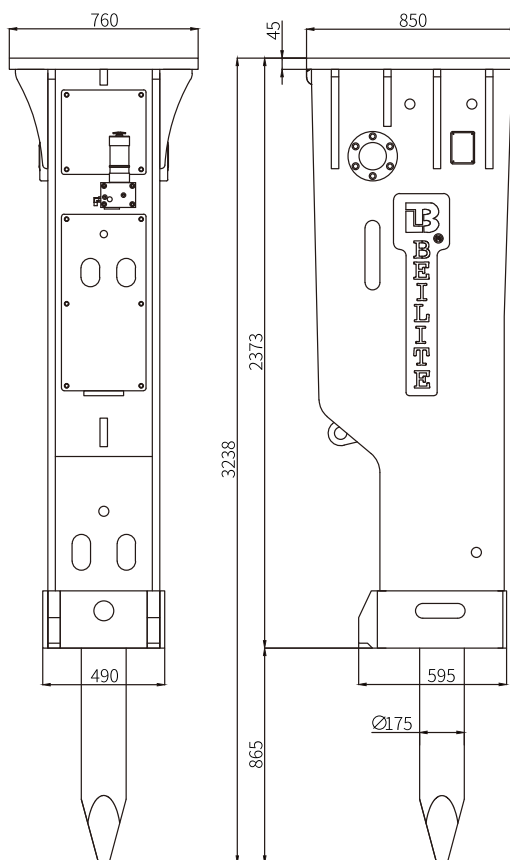

BEILITE MACHINERY CO., LTD.	
Modelno.:	
Serialno.:	
Weight	kg 4575
Length	mm 3683
Required Oil Flow	L/min 220-300
Working Pressure	kg/cm ² 160-180
Impact Rate	b.p.m 100-200
Hose Diameter	in 1 1/4
Chisel Diameter	mm φ175
Chisel Length	mm 1500
Applicable Excavator	m ³ /ton 40-50
WWW.BEILITE.COM	
  	

66mm*87mm

STD. AUTOSMEERSYSTEEM
 STD. AUTOLUBE SCHMIERSYSTEM
 WITH AUTOLUBE SYSTEM
 DE GRAISSAGE AUTOMATIQUE STANDARD

Technical specifications 01/2020

NEDERLANDS 	DEUTSCH 	ENGLISH 	FRANCAIS 		BLTB-175
WERKGEWICHT	BETRIEBSGEWICHT	WORKING WEIGHT	POIDS EN ORDRE DE MARCHÉ	kg	4735
SLAGWERK LENGTE	SCHLAGWERKLÄNGE	CYLINDER LENGHT	LONGUEUR SYSTÈME DE FRAPPE	mm	2260
TOTALE LENGTE	TOTAL LÄNGE	TOTAL LENGTH	LONGUEUR TOTALE	mm	3683
OLIE DEBIET	ÖLMENGE	REQURED OIL FLOW	DÉBIT D'HUILE	l/min	220-270
WERKDRUK	BETRIEBSDRUCK	WORKING PRESSURE	PRESSION DE TRAVAIL	kg/cm ²	200-230
SLAGEN PER MINUUT	SCHLAGFREQUENZ	IMPACT RATE	COUPS / MINUTE	bpm	130-200
BEITEL DIAMETER	WERKZEUGDURCHMESSER	CHISEL DIA	DIAMÈTRED'OUTIL	mm	φ 175
BEITEL LENGTE	MEISSEL LÄNGE	CHISEL LENGHT	LONGUEUR D'OUTIL	mm	1500
SLANG AANSLUITING	SCHLAUCH ANSCHLUSS	HOSE DIA	CONNECTION TUYAUX	inch	1 1/4
ZUIGERACCUMULATOR DRUK	KOLBENSPEICHER DRUCK	BACK HEAD PRESSURE	PRESSION PISTON ACCUMULATEUR	kg/cm ²	25-28
ACCUMULATOR DRUK	AKKUMULATOR DRUCK	ACCUMULATOR PRESSURE	PRESSION ACCUMULATEUR	kg/cm ²	55-60
GRAAFMACHINE KLASSE	BAGGERGRÖSSE	APPLICABLE EXCAVATOR	ENGIN PORTEUR CLASSE	ton	40-50
SLAGKRACHT	SCHLAGENERGIE	IMPACT POWER	FORCE D'IMPACT	J	14000