

ACDE





EUROPE[®]

+31 (0)316-267291


info@acde-europe.com

www.acde-europe.com


ADVANCED CONSTRUCTION & DEMOLITION EQUIPMENT

-  Boomgrijper
-  Tree grab
-  Baumgreifer
-  Grappin de forestier


S1802-B HM1500 pattern

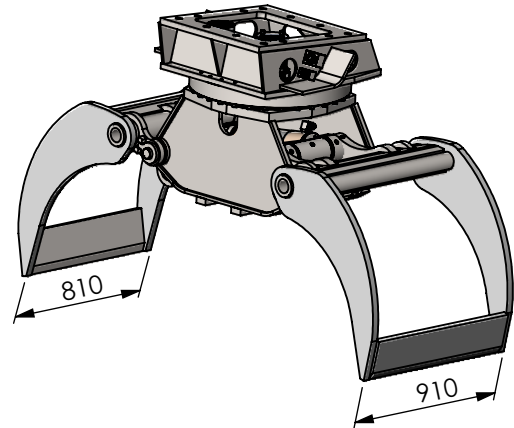


zijkant/side view/
Seitenansicht/vue de côté

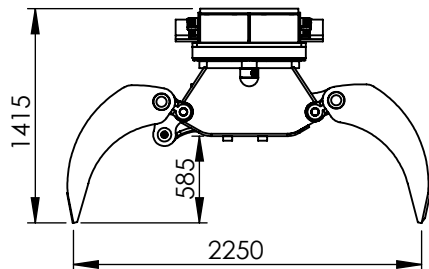

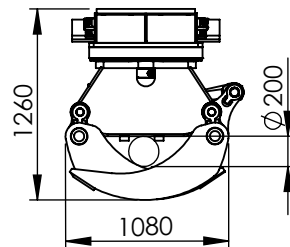

vooraanzicht/front view/
Vorderansicht/vue de face

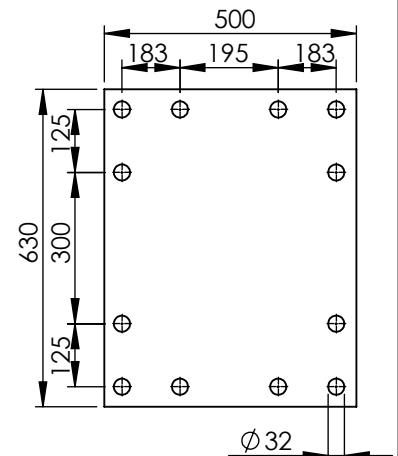

Gatenpatroon/hole pattern/
Bohrbild/motif de trous



Technical specifications

| Nederlands  | English  | Deutsch  | Français  | | |
|--|---|--|--|-------|-------|
| Klasse graafmachine | Class excavator | Machine klasse | Classe de excavatrice | ton | 20-25 |
| Gewicht | Weight | Gewicht | Poids | Kg | 1600 |
| Werkdruk max. | Op. pressure max | Betät. druck max | Pression maximale | bar | 350 |
| Werkdruk rotatie max | Op. pressure rotation max | Betät. druck rotation max | Pression rotation max | bar | 210 |
| Werkdruk rotatie min | Op. pressure rotation min | Betät. druck rotation min | Pression rotation min | bar | 190 |
| Olieflow max | Oil flow max | Öfluss max | Débit d'huile max | l/min | 180 |
| Olieflow rotatie max | Oil flow rotation max | Öfluss rotation max | Débit d'huile rotation max | l/min | 35 |
| Inhoud | Content | Inhalt | Contenance | ltr. | 500 |
| Sluitkracht | Closing force | Schliesskraft | Force de fermeture | kN | 68 |
| Slangaansluiting knijpfunctie | Hose connect open/close | Schlauchanschluss kneifen | Raccord de tuyau fermeture | - | S25 |
| Slangaansluiting draaifunctie | Hose connect turn function | Schlauchanschluss drehen | Raccord de tuyau rotation | - | S16 |