





BEILITE® EUROPE BLTB-100A-5-W

HYDRAULIKHAMMER | HYRAULISCHE HAMER | MARTEAU HYDRAULIQUE | HYDRAULIC HAMMER

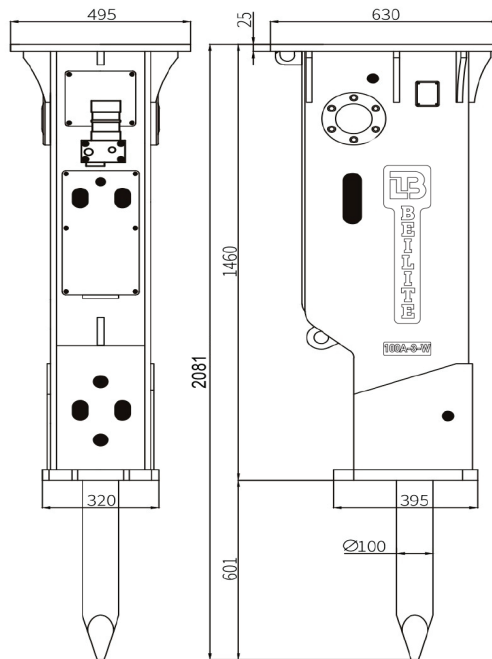

**standard
B®LUBE**



optional
B®TRACK&CHECK

Deutsch | Nederlands | **Français** | English

GESAMTGEWICHT WERKGEWICHT POIS EN ORDRE DE MARCHÉ WORKING WEIGHT 1*)	kg	1020
GESAMTLÄNGE LENGTE LONGUEUR TOTALE TOTAL LENGTH 2*)	mm	2081
BAGGERGRÖSSE GRAAFMACHINE KLASSE EXCAVATRICE APPLICABLE APPLICABLE EXCAVATOR	t	10~14
ÖLFLUSS OLIESTROOM DÉBIT D'HUILE WORKING OIL FLOW	l/min	80~110
BAGGER-EINSTELLDRUCK STEL DRUK GRAAFMACHINE PRESSION DE L'EXCAVATEUR SET PRESSURE EXCAVATOR	bar	210
BETRIEBSDRUCK WERKDRUK PRESSION DE FONCTIONNEMENT OPERATING PRESSURE	bar	150~170
SCHLAGFREQUENZ SLAGFREQUENTIE FRÉQUENCE D'IMPACT IMPACT RATE	bpm	350~700
WERKZEUGDURCHMESSER BEITEL DIAMETER DIAMÈTRE DU BURIN CHISEL DIAMETER	mm	100
WERKZEUGLÄNGE BEITEL LENGTE LONGUEUR DU BURIN CHISEL LENGTH	mm	1000
SCHLAUCHANSCHLUSS SLANG AANSluitING DIAMÈTRE DU TUYAU HOSE DIAMETER 10*)	inch	3/4
KOLBENSPEICHERDRUCK ZUIGERACCUMULATOR DRUCK PRESSION ACCUMULATEUR PISTON N2 PRESSURE (BACK HEAD)	bar	14~17
AKKUMULATORDRUCK ACCUMULATOR DRUCK PRESSION ACCUMULATEUR N2 PRESSURE (ACCUMULATOR)	bar	55~60
SCHALL 85DB(A)-ENTFERNUNG GELUID 85DB(A)-AFSTAND BRUIT 85DB(A)-DISTANCE NOISE 85DB(A)-DISTANCE	m	7~14
LOCHMUSTER GATENPATROON MODÈLE DE TROUS HOLE PATTERN		AC09
SCHRAUBENGROSSE BOUTGROOTTE TAILLE DE BOULON BOLT SIZE		M30
SCHMIERSYSTEM SMEERSYSTEEM SYSTÈME DE LUBRIFICATION AUTOMATIQUE AUTOMATIC GREASING SYSTEM		4*)
KABELLOSER DATENTRACKER DRAADLOZE GEGEVENSTRACKER TRACEURS DE DONNÉES SANS FIL WIRELESS DATA TRACKER		optional

1*) ARBEITSGEWICHT kann je nach Ausführung abweichen | GEWICHT Kan afhankelijk van de uitvoering afwijken | POIDS Peut varier selon l'exécution | WORKING WEIGHT may vary depending on the version 2*) GESAMTLÄNGE mit Meißel | TOTAALLENGTE met beitel | LONGUEUR TOTALE avec burin | TOTAL LENGTH with Chisel

3*) MINI B@LUBE SCHMIERSYSTEM optional | MINI B@LUBE SMEERSYSTEEM optioneel | MINI B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE optionnel | MINI B@LUBE AUTOMATIC GREASING SYSTEM optional

4*) B@LUBE SCHMIERSYSTEM standard | B@LUBE SMEERSYSTEEM standaard | B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE standard | B@LUBE AUTOMATIC GREASING SYSTEM standard

4 -)	BOLUBE SCHMIERSYSTEME standard	BOLUBE SCHMIERSYSTEME standard	BOLUBE SYSTEME DE LUBRIFICATION AUTOMATIQUE standard	BOLUBE AUTOMATIC GREASING SYSTEM standard
RI-®)	LIJRE SCHMIERSYSTEME standard	RI-®) LIJRE SMFERSYSTEME standard	RI-®) LIJRE SYSTEME DE LUBRIFICATION AUTOMATIQUE standard	RI-®) LIJRE AUTOMATIC GREASING SYSTEM standard

5*) BI-B®LUBE SCHMIERSYSTEM standard | BI-B®LUBE SMEERSYSTEEM standaard | BI-B®LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE standard | BI-B®LUBE AUTOMATIC GREASING SYSTEM standard



ACDE® Europe

Netherlands ☎ +31 316 267291

Netherlands 📞 +31 6 53150283
Niederlande 📞 +31 6 53150283

Switzerland ☎ +41 625880164

Schweiz +41 793649583

✉ info@acde-europe.com

 www.acde-europe.com



OPEN |

