





BEILITE® EUROPE BLTB-40-5

HYDRAULIKHAMMER | HYDRAULISCHE HAMER | MARTEAU HYDRAULIQUE | HYDRAULIC HAMMER

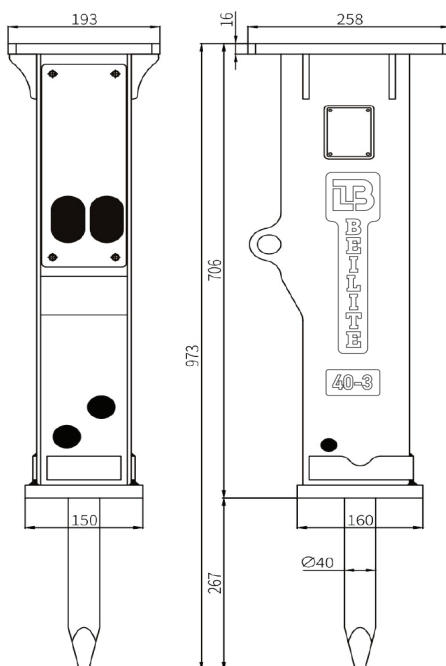

optional
B@LUBE MINI



optional
B@TRACK&CHECK

Deutsch | Nederlands | Français | English

ARBEITSGEWICHT WERKGEWICHT POIS EN ORDRE DE MARCHÉ WORKING WEIGHT 1*)	kg	96
GESAMTLÄNGE LENGTE LONGUEUR TOTALE TOTAL LENGTH 2*)	mm	973
BAGGERGRÖSSE GRAAFMACHINE KLASSE EXCAVATRICE APPLICABLE APPLICABLE EXCAVATOR	t	0.5~1.2
ÖLFLUSS OLIESTROOM DÉBIT D'HUILE WORKING OIL FLOW	l/min	15~30
BAGGER-EINSTELLDRUCK STEL DRUK GRAAFMACHINE PRESSION DE L'EXCAVATEUR SET PRESSURE EXCAVATOR	bar	130
BETRIEBSDRUCK WERKDRUK PRESSION DE FONCTIONNEMENT OPERATING PRESSURE	bar	90~120
SCHLAGFREQUENZ SLAGFREQUENTIE FRÉQUENCE D'IMPACT IMPACT RATE	bpm	800~1400
WERKZEUGDURCHMESSER BEITEL DIAMETER DIAMÈTRE DU BURIN CHISEL DIAMETER	mm	40
WERKZEUGLÄNGE BEITEL LENGTE LONGUEUR DU BURIN CHISEL LENGTH	mm	450
SCHLAUCHANSCHLUSS SLANG AANSLUITING DIAMÈTRE DU TUYAU HOSE DIAMETER 10*)	inch	0,50
KOLBENSPEICHERDRUCK ZUIGERACCUMULATOR DRUCK PRESSION ACCUMULATEUR PISTON N2 PRESSURE (BACK HEAD)	bar	14~17
AKKUMULATORDRUCK ACCUMULATOR DRUCK PRESSION ACCUMULATEUR N2 PRESSURE (ACCUMULATOR)	bar	/
SCHALL 85DB(A)-ENTFERNUNG GELUID 85DB(A)-AFSTAND BRUIT 85DB(A)-DISTANCE NOISE 85DB(A)-DISTANCE	m	2~5
LOCHMUSTER GATENPATROON MODÈLE DE TROUS HOLE PATTERN		AC02
SCHRAUBENGROSSE BOUTGROOTTE TAILLE DE BOULON BOLT SIZE		M16
SCHMIERSYSTEM SMEERSYSTEEM SYSTÈME DE LUBRIFICATION AUTOMATIQUE AUTOMATIC GREASING SYSTEM		3*)
KABELLOSER DATENTRACKER DRAADLOZE GEGEVENSTRACKER TRACEURS DE DONNÉES SANS FIL WIRELESS DATA TRACKER		optional

1*) ARBEITSGEWICHT kann je nach Ausführung abweichen | GEWICHT Kan afhankelijk van de uitvoering afwijken | POIDS Peut varier selon l'exécution | WORKING WEIGHT may vary depending on the version 2*) GESAMTLÄNGE mit Meißel | TOTAALLENTE met beitel | LONGUEUR TOTALE avec burin | TOTAL LENGTH with Chisel

3*) MINI B@LUBE SCHMIERSYSTEM optional | MINI B@LUBE SMEERSYSTEEM optioneel | MINI B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE optionnel | MINI B@LUBE AUTOMATIC GREASING SYSTEM optional

4*) B@LUBE SCHMIERSYSTEM standard | B@LUBE SMEERSYSTEEM standaard | B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE standard | B@LUBE AUTOMATIC GREASING SYSTEM standard

5*) BI-B@LUBE SCHMIERSYSTEM standard | BI-B@LUBE SMEERSYSTEEM standaard | BI-B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE standard | BI-B@LUBE AUTOMATIC GREASING SYSTEM standard



ACDE® Europe

Netherlands ☎ +31 316 267291

Niederlande ☎ +31 6 53150283

Switzerland ☎ +41 625880164


Schweiz ☎ +41 793649583

✉ info@acde-europe.com

🌐 www.acde-europe.com






ADVANCED CONSTRUCTION & DEMOLITION EQUIPMENT



LB

BEILITE® EUROPE BLTB-45-5

HYDRAULIKHAMMER | HYRAULISCHE HAMER | MARTEAU HYDRAULIQUE | HYDRAULIC HAMMER

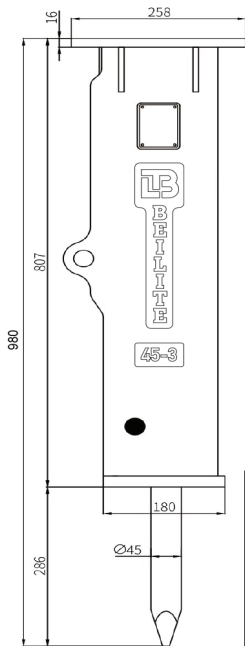

optional
B@LUBE MINI



optional
B@TRACK&CHECK

Deutsch | Nederlands | Français | English

GESAMTGEWICHT WERKGEWICHT POIS EN ORDRE DE MARCHÉ WORKING WEIGHT 1*)	kg	133
GESAMTLÄNGE LENGTE LONGUEUR TOTALE TOTAL LENGTH 2*)	mm	980
BAGGERGRÖSSE GRAAFMACHINE KLASSE EXCAVATRICE APPLICABLE APPLICABLE EXCAVATOR	t	0.8~1.5
ÖLFLUSS OLIESTROOM DÉBIT D'HUILE WORKING OIL FLOW	l/min	20~40
BAGGER-EINSTELLD RUCK STEL DRUK GRAAFMACHINE PRESSION DE L'EXCAVATEUR SET PRESSURE EXCAVATOR	bar	140
BETRIEBSDRUCK WERKDRUK PRESSION DE FONCTIONNEMENT OPERATING PRESSURE	bar	90~120
SCHLAGFREQUENZ SLAGFREQUENTIE FRÉQUENCE D'IMPACT IMPACT RATE	bpm	700~1200
WERKZEUGDURCHMESSER BEITEL DIAMETER DIAMÈTRE DU BURIN CHISEL DIAMETER	mm	45
WERKZEUGLÄNGE BEITEL LENGTE LONGUEUR DU BURIN CHISEL LENGTH	mm	500
SCHLAUCHANSCHLUSS SLANG AANSLUITING DIAMÈTRE DU TUYAU HOSE DIAMETER 10*)	inch	1/2
KOLBENSPEICHERDRUCK ZUIGERACCUMULATOR DRUCK PRESSION ACCUMULATEUR PISTON N2 PRESSURE (BACK HEAD)	bar	14~17
AKKUMULATORDRUCK ACCUMULATOR DRUCK PRESSION ACCUMULATEUR N2 PRESSURE (ACCUMULATOR)	bar	/
SCHALL 85DB(A)-ENTFERNUNG GELUID 85DB(A)-AFSTAND BRUIT 85DB(A)-DISTANCE NOISE 85DB(A)-DISTANCE	m	3~6
LOCHMUSTER GATENPATROON MODÈLE DE TROUS HOLE PATTERN		AC02
SCHRAUBENG RÖSSE BOUTGROOTTE TAILLE DE BOULON BOLT SIZE		M16
SCHMIERSYSTEM SMEERSYSTEEM SYSTÈME DE LUBRIFICATION AUTOMATIQUE AUTOMATIC GREASING SYSTEM		3*)
KABELLOSER DATENTRACKER DRAADLOZE GEGEVENSTRACKER TRACEURS DE DONNÉES SANS FIL WIRELESS DATA TRACKER		optional




ACDE® Europe
Netherlands ☎ +31 316 267291
Niederlande ☎ +31 6 53150283
Switzerland ☎ +41 625880164
Schweiz ☎ +41 793649583

info@acde-europe.com
www.acde-europe.com





ADVANCED CONSTRUCTION & DEMOLITION EQUIPMENT





BEILITE® EUROPE BLTB-53-5

HYDRAULIKHAMMER | HYDRAULISCHE HAMER | MARTEAU HYDRAULIQUE | HYDRAULIC HAMMER

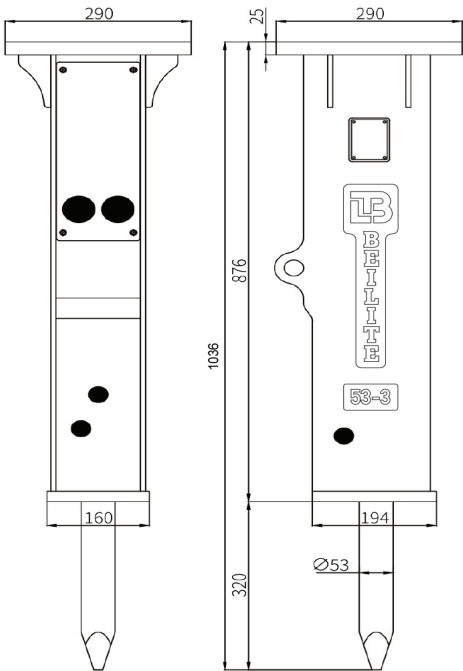

optional
B@LUBE MINI



optional
B@TRACK&CHECK

Deutsch | Nederlands | Français | English


GESAMTGEWICHT WERKGEWICHT POIS EN ORDRE DE MARCHÉ WORKING WEIGHT 1*)	kg	172
GESAMTLÄNGE LENGTE LONGUEUR TOTALE TOTAL LENGTH 2*)	mm	1036
BAGGERGRÖSSE GRAAFMACHINE KLASSE EXCAVATRICE APPLICABLE APPLICABLE EXCAVATOR	t	1.5-3.5
ÖLFLUSS OLIESTROOM DÉBIT D'HUILE WORKING OIL FLOW	l/min	20-50
BAGGER-EINSTELLDRUCK STEL DRUK GRAAFMACHINE PRESSION DE L'EXCAVATEUR SET PRESSURE EXCAVATOR	bar	150
BETRIEBSDRUCK WERKDRUK PRESSION DE FONCTIONNEMENT OPERATING PRESSURE	bar	90-120
SCHLAGFREQUENZ SLAGFREQUENTIE FRÉQUENCE D'IMPACT IMPACT RATE	bpm	600-1100
WERKZEUGDURCHMESSER BEITEL DIAMETER DIAMÈTRE DU BURIN CHISEL DIAMETER	mm	53
WERKZEUGLÄNGE BEITEL LENGTE LONGUEUR DU BURIN CHISEL LENGTH	mm	580
SCHLAUCHANSCHLUSS SLANG AANSLUITING DIAMÈTRE DU TUYAU HOSE DIAMETER 10*)	inch	1/2
KOLBENSPEICHERDRUCK ZUIGERACCUMULATOR DRUCK PRESSION ACCUMULATEUR PISTON N2 PRESSURE (BACK HEAD)	bar	14-17
AKKUMULATORDRUCK ACCUMULATOR DRUCK PRESSION ACCUMULATEUR N2 PRESSURE (ACCUMULATOR)	bar	/
SCHALL 85DB(A)-ENTFERNUNG GELUID 85DB(A)-AFSTAND BRUIT 85DB(A)-DISTANCE NOISE 85DB(A)-DISTANCE	m	4-8
LOCHMUSTER GATENPATROON MODÈLE DE TROUS HOLE PATTERN		AC03
SCHRAUBENGROESSE BOUTGROOTTE TAILLE DE BOULON BOLT SIZE		M16
SCHMIERSYSTEM SMEERSYSTEEM SYSTÈME DE LUBRIFICATION AUTOMATIQUE AUTOMATIC GREASING SYSTEM		3*)
KABELLOSER DATENTRACKER DRAADLOZE GEGEVENSTRACKER TRACEURS DE DONNÉES SANS FIL WIRELESS DATA TRACKER		optional

1*) ARBEITSGEWICHT kann je nach Ausführung abweichen | GEWICHT Kan afhankelijk van de uitvoering afwijken | POIDS Peut varier selon l'exécution | WORKING WEIGHT may vary depending on the version 2*) GESAMTLÄNGE mit Meißel | TOTAALLENGTE met beitel | LONGUEUR TOTALE avec burin | TOTAL LENGTH with Chisel 3*) MINI B@LUBE SCHMIERSYSTEM optional | MINI B@LUBE SMEERSYSTEEM optioneel | MINI B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE optionnel | MINI B@LUBE AUTOMATIC GREASING SYSTEM optional 4*) B@LUBE SCHMIERSYSTEM standard | B@LUBE SMEERSYSTEEM standaard | B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE standard | B@LUBE AUTOMATIC GREASING SYSTEM standard 5*) BI-B@LUBE SCHMIERSYSTEM standard | BI-B@LUBE SMEERSYSTEEM standaard | BI-B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE standard | BI-B@LUBE AUTOMATIC GREASING SYSTEM standard



ACDE® Europe
Netherlands ☎ +31 316 267291 ✉ info@acde-europe.com
Niederlande ☎ +31 6 53150283 🌐 www.acde-europe.com
Switzerland ☎ +41 625880164
Schweiz ☎ +41 793649583
EDA OPEN S


ADVANCED CONSTRUCTION & DEMOLITION EQUIPMENT





BEILITE® EUROPE BLTB-60-5

HYDRAULIKHAMMER | HYDRAULISCHE HAMER | MARTEAU HYDRAULIQUE | HYDRAULIC HAMMER

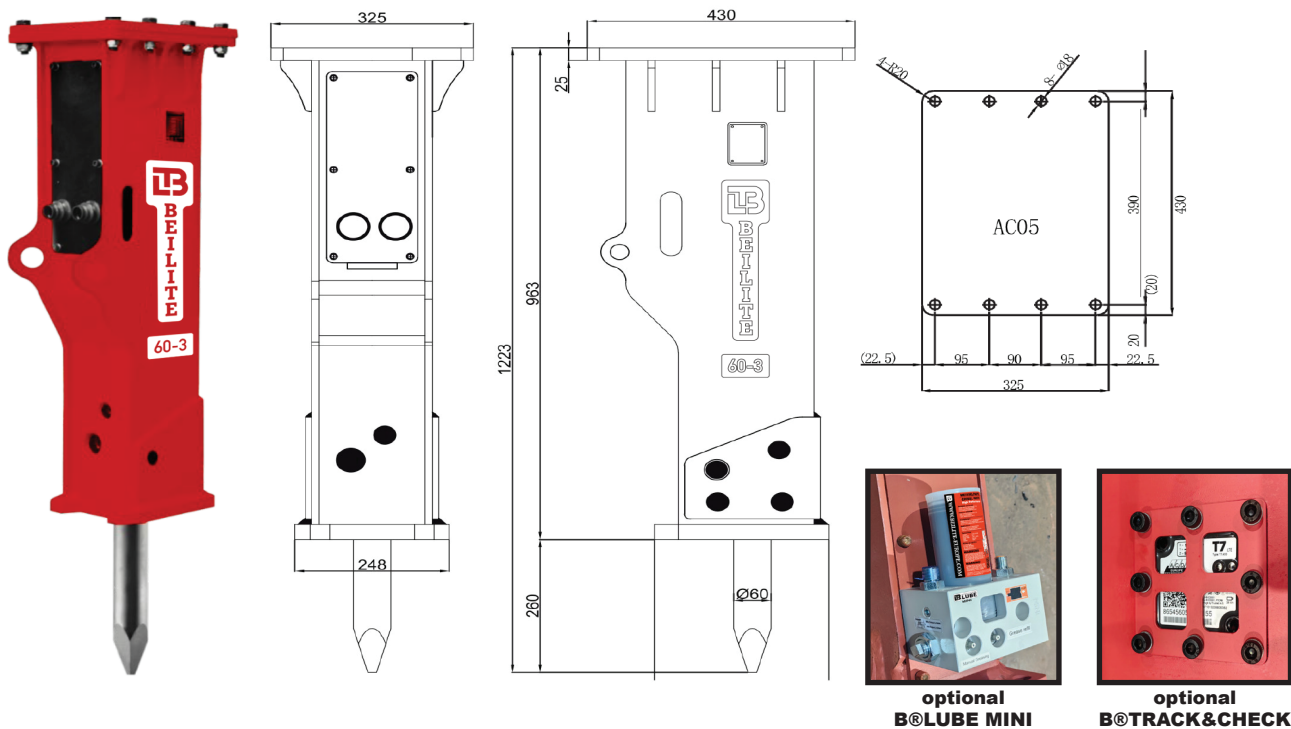

Deutsch | Nederlands | Français | English

GESAMTGEWICHT WERKGEWICHT POIS EN ORDRE DE MARCHÉ WORKING WEIGHT 1*)	kg	295
GESAMTLÄNGE LENGTE LONGUEUR TOTALE TOTAL LENGTH 2*)	mm	1223
BAGGERGRÖSSE GRAAFMACHINE KLASSE EXCAVATRICE APPLICABLE APPLICABLE EXCAVATOR	t	3~5.5
ÖLFLUSS OLIESTROOM DÉBIT D'HUILE WORKING OIL FLOW	l/min	30~60
BAGGER-EINSTELLD RUCK STEL DRUK GRAAFMACHINE PRESSION DE L'EXCAVATEUR SET PRESSURE EXCAVATOR	bar	160
BETRIEBSDRUCK WERKDRUK PRESSION DE FONCTIONNEMENT OPERATING PRESSURE	bar	100~130
SCHLAGFREQUENZ SLAGFREQUENTIE FRÉQUENCE D'IMPACT IMPACT RATE	bpm	500~1000
WERKZEUGDURCHMESSER BEITEL DIAMETER DIAMÈTRE DU BURIN CHISEL DIAMETER	mm	60
WERKZEUGLÄNGE BEITEL LENGTE LONGUEUR DU BURIN CHISEL LENGTH	mm	600
SCHLAUCHANSCHLUSS SLANG AANSLUITING DIAMÈTRE DU TUYAU HOSE DIAMETER 10*)	inch	1/2
KOLBENSPEICHERDRUCK ZUIGERACCUMULATOR DRUCK PRESSION ACCUMULATEUR PISTON N2 PRESSURE (BACK HEAD)	bar	14~17
AKKUMULATORDRUCK ACCUMULATOR DRUCK PRESSION ACCUMULATEUR N2 PRESSURE (ACCUMULATOR)	bar	/
SCHALL 85DB(A)-ENTFERNUNG GELUID 85DB(A)-AFSTAND BRUIT 85DB(A)-DISTANCE NOISE 85DB(A)-DISTANCE	m	4~8
LOCHMUSTER GATENPATROON MODÈLE DE TROUS HOLE PATTERN		AC05
SCHRAUBENG RÖSSE BOUTGROOTTE TAILLE DE BOULON BOLT SIZE		M16
SCHMIERSYSTEM SMEERSYSTEEM SYSTÈME DE LUBRIFICATION AUTOMATIQUE AUTOMATIC GREASING SYSTEM		3*)
KABELLOSER DATENTRACKER DRAADLOZE GEGEVENSTRACKER TRACEURS DE DONNÉES SANS FIL WIRELESS DATA TRACKER		optional

1*) ARBEITSGEWICHT kann je nach Ausführung abweichen | GEWICHT Kan afhankelijk van de uitvoering afwijken | POIDS Peut varier selon l'exécution | WORKING WEIGHT may vary depending on the version 2*) GESAMTLÄNGE mit Meißel | TOTAALLENTE met beitel | LONGUEUR TOTALE avec burin | TOTAL LENGTH with Chisel 3*) MINI B@LUBE SCHMIERSYSTEM optional | MINI B@LUBE SMEERSYSTEEM optioneel | MINI B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE optionnel | MINI B@LUBE AUTOMATIC GREASING SYSTEM optional 4*) B@LUBE SCHMIERSYSTEM standard | B@LUBE SMEERSYSTEEM standaard | B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE standard | B@LUBE AUTOMATIC GREASING SYSTEM standard 5*) BI-B@LUBE SCHMIERSYSTEM standard | BI-B@LUBE SMEERSYSTEEM standaard | BI-B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE standard | BI-B@LUBE AUTOMATIC GREASING SYSTEM standard



ACDE® Europe

Netherlands ☎ +31 316 267291 ✉ info@acde-europe.com

Niederlande ☎ +31 6 53150283 🌐 www.acde-europe.com

Switzerland ☎ +41 625880164

Schweiz ☎ +41 793649583

ADVANCED CONSTRUCTION & DEMOLITION EQUIPMENT








BEILITE® EUROPE BLTB-70-5

HYDRAULIKHAMMER | HYDRAULISCHE HAMER | MARTEAU HYDRAULIQUE | HYDRAULIC HAMMER

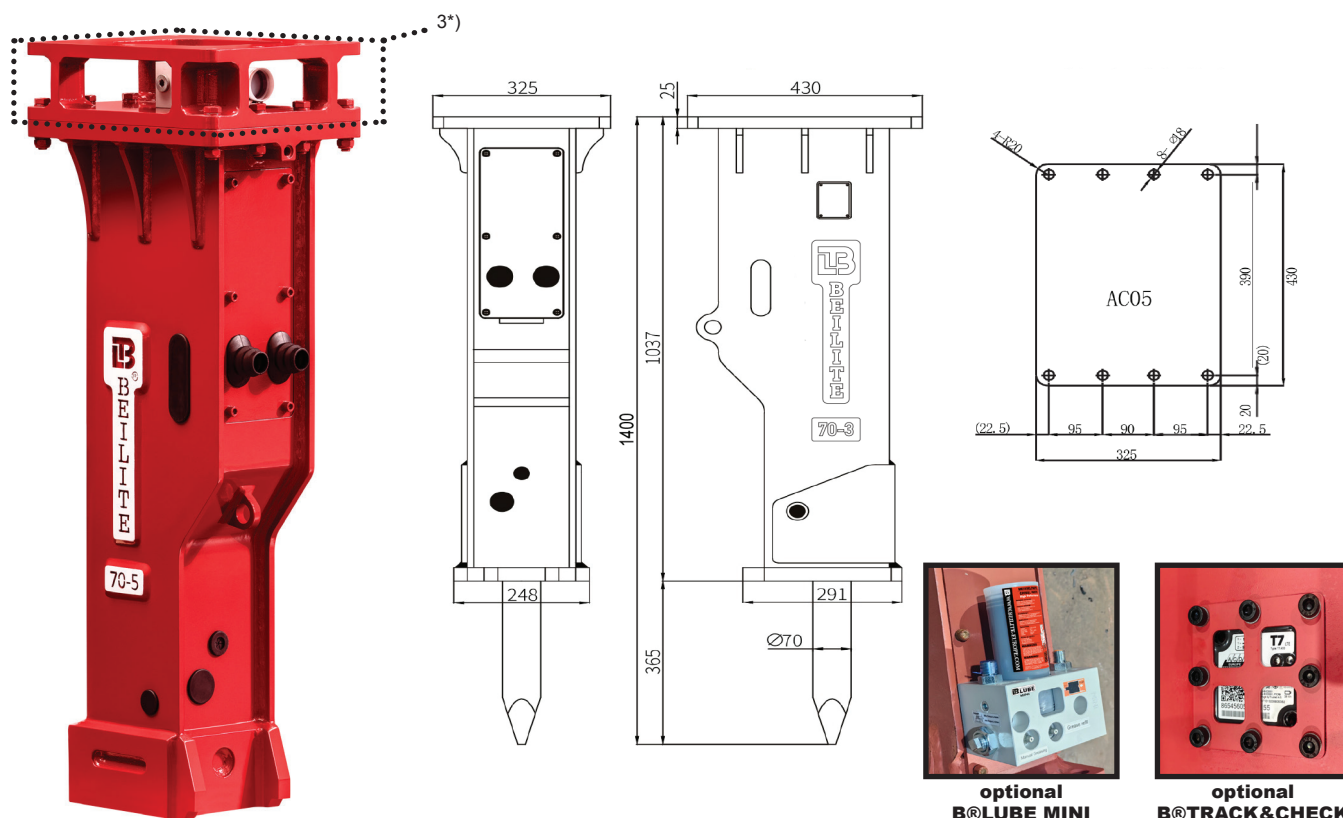

Deutsch | Nederlands | Français | English

GESAMTGEWICHT WERKGEWICHT POIS EN ORDRE DE MARCHÉ WORKING WEIGHT 1*)	kg	345
GESAMTLÄNGE LENGTE LONGUEUR TOTALE TOTAL LENGTH 2*)	mm	1400
BAGGERGRÖSSE GRAAFMACHINE KLASSE EXCAVATRICE APPLICABLE APPLICABLE EXCAVATOR	t	4.5~6
ÖLFLUSS OLIESTROOM DÉBIT D'HUILE WORKING OIL FLOW	l/min	40~70
BAGGER-EINSTELLDRIK STEL DRUK GRAAFMACHINE PRESSIEN DE L'EXCAVATEUR SET PRESSURE EXCAVATOR	bar	160
BETRIEBSDRUK WERKDRUK PRESSIEN DE FONCTIONNEMENT OPERATING PRESSURE	bar	110~140
SCHLAGFREQUENZ SLAGFREQUENTIE FRÉQUENCE D'IMPACT IMPACT RATE	bpm	500~900
WERKZEUGDURCHMESSER BEITEL DIAMETER DIAMÈTRE DU BURIN CHISEL DIAMETER	mm	70
WERKZEUGLÄNGE BEITEL LENGTE LONGUEUR DU BURIN CHISEL LENGTH	mm	700
SCHLAUCHANSCHLUSS SLANG AANSLUITING DIAMÈTRE DU TUYAU HOSE DIAMETER 10*)	inch	1/2
KOLBENSPEICHERDRUK ZUIGERACCUMULATOR DRUK PRESSIEN ACCUMULATEUR PISTON N2 PRESSURE (BACK HEAD)	bar	14~17
AKKUMULATORDRUK ACCUMULATOR DRUK PRESSIEN ACCUMULATEUR N2 PRESSURE (ACCUMULATOR)	bar	55~60
SCHALL 85DB(A)-ENTFERNUNG GELUID 85DB(A)-AFSTAND BRUIT 85DB(A)-DISTANCE NOISE 85DB(A)-DISTANCE	m	5~10
LOCHMUSTER GATENPATROON MODÈLE DE TROUS HOLE PATTERN		AC05
SCHRAUBENGROESSE BOUTGROOTTE TAILLE DE BOULON BOLT SIZE		M16
SCHMIERSYSTEM SMEERSYSTEEM SYSTÈME DE LUBRIFICATION AUTOMATIQUE AUTOMATIC GREASING SYSTEM		3*)
KABELLOSER DATENTRACKER DRAADLOZE GEGEVENSTRACKER TRACEURS DE DONNÉES SANS FIL WIRELESS DATA TRACKER		optional

1*) ARBEITSGEWICHT kann je nach Ausführung abweichen | GEWICHT Kan afhankelijk van de uitvoering afwijken | POIDS Peut varier selon l'exécution | WORKING WEIGHT may vary depending on the version 2*) GESAMTLÄNGE mit Meißel | TOTAALLENTE met beitel | LONGUEUR TOTALE avec burin | TOTAL LENGTH with Chisel

3*) MINI B@LUBE SCHMIERSYSTEM optional | MINI B@LUBE SMEERSYSTEEM optioneel | MINI B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE optionnel | MINI B@LUBE AUTOMATIC GREASING SYSTEM optional

4*) B@LUBE SCHMIERSYSTEM standard | B@LUBE SMEERSYSTEEM standaard | B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE standard | B@LUBE AUTOMATIC GREASING SYSTEM standard

5*) BI-B@LUBE SCHMIERSYSTEM standard | BI-B@LUBE SMEERSYSTEEM standaard | BI-B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE standard | BI-B@LUBE AUTOMATIC GREASING SYSTEM standard



ACDE® Europe

Netherlands ☎ +31 316 267291

Niederlande ☎ +31 6 53150283


Switzerland ☎ +41 625880164

Schweiz ☎ +41 793649583

✉ info@acde-europe.com
www.acde-europe.com





ADVANCED CONSTRUCTION & DEMOLITION EQUIPMENT





BEILITE® EUROPE BLTB-75-5

HYDRAULIKHAMMER | HYRAULISCHE HAMER | MARTEAU HYDRAULIQUE | HYDRAULIC HAMMER

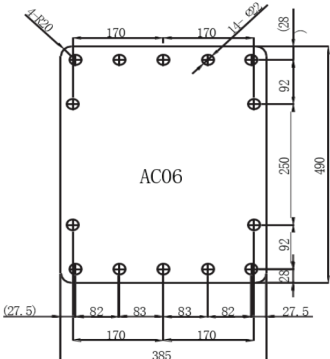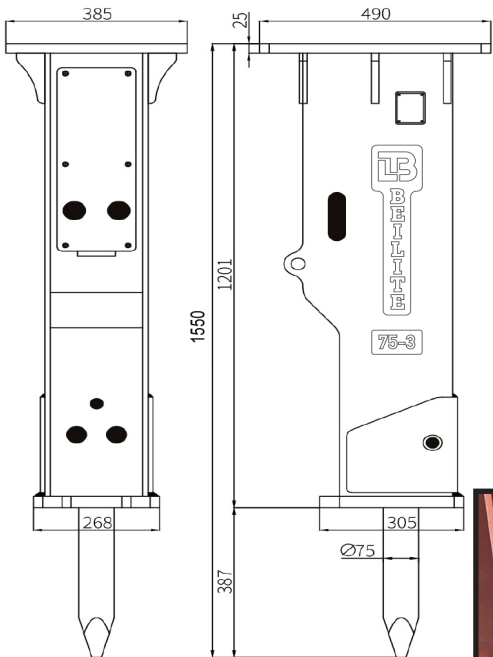

optional
B@LUBE MINI



optional
B@TRACK&CHECK


Deutsch | Nederlands | Français | English

GESAMTGEWICHT WERKGEWICHT POIS EN ORDRE DE MARCHÉ WORKING WEIGHT 1*)	kg	442
GESAMTLÄNGE LENGTE LONGUEUR TOTALE TOTAL LENGTH 2*)	mm	1550
BAGGERGRÖSSE GRAAFMACHINE KLASSE EXCAVATRICE APPLICABLE APPLICABLE EXCAVATOR	t	6~8.5
ÖLFLUSS OLIESTROOM DÉBIT D'HUILE WORKING OIL FLOW	l/min	50~90
BAGGER-EINSTELLDRIK STEL DRIK GRAAFMACHINE PRESSION DE L'EXCAVATEUR SET PRESSURE EXCAVATOR	bar	180
BETRIEBSDRIK WERKDRIK PRESSION DE FONCTIONNEMENT OPERATING PRESSURE	bar	120~150
SCHLAGFREQUENZ SLAGFREQUENTIE FRÉQUENCE D'IMPACT IMPACT RATE	bpm	400~800
WERKZEUGDURCHMESSER BEITEL DIAMETER DIAMÈTRE DU BURIN CHISEL DIAMETER	mm	75
WERKZEUGLÄNGE BEITEL LENGTE LONGUEUR DU BURIN CHISEL LENGTH	mm	750
SCHLAUCHANSCHLUSS SLANG AANSLUITING DIAMÈTRE DU TUYAU HOSE DIAMETER 10*)	inch	1/2
KOLBENSPEICHERDRIK ZUIGERACCUMULATOR DRIK PRESSION ACCUMULATEUR PISTON N2 PRESSURE (BACK HEAD)	bar	14~17
AKKUMULATORDRIK ACCUMULATOR DRIK PRESSION ACCUMULATEUR N2 PRESSURE (ACCUMULATOR)	bar	55~60
SCHALL 85DB(A)-ENTFERNUNG GELUID 85DB(A)-AFSTAND BRUIT 85DB(A)-DISTANCE NOISE 85DB(A)-DISTANCE	m	6~12
LOCHMUSTER GATENPATROON MODÈLE DE TROUS HOLE PATTERN		AC06
SCHRAUBENGROESSE BOUTGROOTTE TAILLE DE BOULON BOLT SIZE		M20
SCHMIERSYSTEM SMEERSYSTEEM SYSTÈME DE LUBRIFICATION AUTOMATIQUE AUTOMATIC GREASING SYSTEM		3*)
KABELLOSER DATENTRACKER DRAADLOZE GEGEVENSTRACKER TRACEURS DE DONNÉES SANS FIL WIRELESS DATA TRACKER		optional

1*) ARBEITSGEWICHT kann je nach Ausführung abweichen | GEWICHT Kan afhankelijk van de uitvoering afwijken | POIDS Peut varier selon l'exécution | WORKING WEIGHT may vary depending on the version 2*) GESAMTLÄNGE mit Meißel | TOTAALLENTE met beitel | LONGUEUR TOTALE avec burin | TOTAL LENGTH with Chisel
3*) MINI B@LUBE SCHMIERSYSTEM optional | MINI B@LUBE SMEERSYSTEEM optioneel | MINI B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE optionnel | MINI B@LUBE AUTOMATIC GREASING SYSTEM optional
4*) B@LUBE SCHMIERSYSTEM standard | B@LUBE SMEERSYSTEEM standaard | B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE standard | B@LUBE AUTOMATIC GREASING SYSTEM standard
5*) BI-B@LUBE SCHMIERSYSTEM standard | BI-B@LUBE SMEERSYSTEEM standaard | BI-B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE standard | BI-B@LUBE AUTOMATIC GREASING SYSTEM standard





ACDE® Europe
Netherlands ☎ +31 316 267291 ✉ info@acde-europe.com
Niederlande ☎ +31 6 53150283 🌐 www.acde-europe.com
Switzerland ☎ +41 625880164
Schweiz ☎ +41 793649583
EDA OPEN S





BEILITE® EUROPE BLTB-85-5

HYDRAULIKHAMMER | HYDRAULISCHE HAMER | MARTEAU HYDRAULIQUE | HYDRAULIC HAMMER

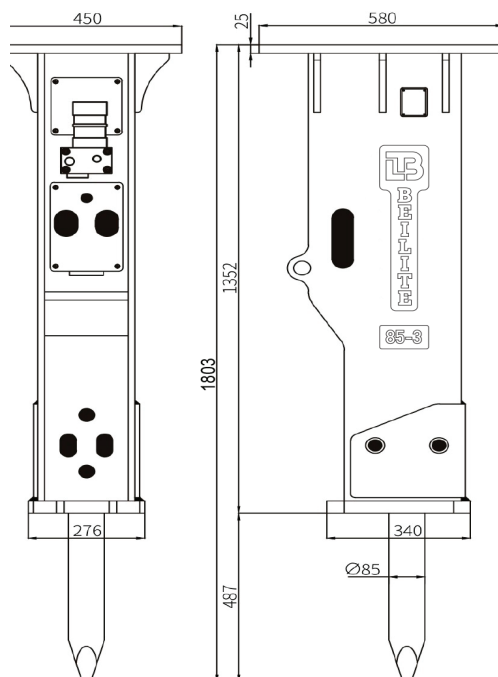

**standard
B@LUBE**



**optional
B@TRACK&CHECK**

Deutsch | Nederlands | Français | English

GESAMTGEWICHT WERKGEWICHT POIS EN ORDRE DE MARCHÉ WORKING WEIGHT 1*)	kg	624
GESAMTLÄNGE LENGTE LONGUEUR TOTALE TOTAL LENGTH 2*)	mm	1803
BAGGERGRÖSSE GRAAFMACHINE KLASSE EXCAVATRICE APPLICABLE APPLICABLE EXCAVATOR	t	7~11
ÖLFLUSS OLIESTROOM DÉBIT D'HUILE WORKING OIL FLOW	l/min	60~100
BAGGER-EINSTELLDRIK STEL DRUK GRAAFMACHINE PRESSIEN DE L'EXCAVATEUR SET PRESSURE EXCAVATOR	bar	180
BETRIEBSDRUK WERKDRUK PRESSIEN DE FONCTIONNEMENT OPERATING PRESSURE	bar	130~160
SCHLAGFREQUENZ SLAGFREQUENTIE FRÉQUENCE D'IMPACT IMPACT RATE	bpm	400~800
WERKZEUGDURCHMESSER BEITEL DIAMETER DIAMÈTRE DU BURIN CHISEL DIAMETER	mm	85
WERKZEUGLÄNGE BEITEL LENGTE LONGUEUR DU BURIN CHISEL LENGTH	mm	850
SCHLAUCHANSCHLUSS SLANG AANSLUITING DIAMÈTRE DU TUYAU HOSE DIAMETER 10*)	inch	3/4
KOLBENSPEICHERDRUK ZUIGERACCUMULATOR DRUK PRESSIEN ACCUMULATEUR PISTON N2 PRESSURE (BACK HEAD)	bar	14~17
AKKUMULATORDRUK ACCUMULATOR DRUK PRESSIEN ACCUMULATEUR N2 PRESSURE (ACCUMULATOR)	bar	55~60
SCHALL 85DB(A)-ENTFERNUNG GELUID 85DB(A)-AFSTAND BRUIT 85DB(A)-DISTANCE NOISE 85DB(A)-DISTANCE	m	6~12
LOCHMUSTER GATENPATROON MODÈLE DE TROUS HOLE PATTERN		AC08
SCHRAUBENGRÖSSE BOUTGROOTTE TAILLE DE BOULON BOLT SIZE		M20
SCHMIERSYSTEM SMEERSYSTEEM SYSTÈME DE LUBRIFICATION AUTOMATIQUE AUTOMATIC GREASING SYSTEM		4*)
KABELLOSER DATENTRACKER DRAADLOZE GEGEVENSTRACKER TRACEURS DE DONNÉES SANS FIL WIRELESS DATA TRACKER		optional

1*) ARBEITSGEWICHT kann je nach Ausführung abweichen | GEWICHT Kan afhankelijk van de uitvoering afwijken | POIDS Peut varier selon l'exécution | WORKING WEIGHT may vary depending on the version 2*) GESAMTLÄNGE mit Meißel | TOTAALLENTE met beitel | LONGUEUR TOTALE avec burin | TOTAL LENGTH with Chisel

3*) MINI B@LUBE SCHMIERSYSTEM optional | MINI B@LUBE SMEERSYSTEEM optioneel | MINI B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE optionnel | MINI B@LUBE AUTOMATIC GREASING SYSTEM optional

4*) B@LUBE SCHMIERSYSTEM standard | B@LUBE SMEERSYSTEEM standaard | B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE standard | B@LUBE AUTOMATIC GREASING SYSTEM standard

5*) BI-B@LUBE SCHMIERSYSTEM standard | BI-B@LUBE SMEERSYSTEEM standaard | BI-B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE standard | BI-B@LUBE AUTOMATIC GREASING SYSTEM standard



ACDE® Europe

Netherlands ☎ +31 316 267291

Niederlande ☎ +31 6 53150283

Switzerland ☎ +41 625880164


Schweiz ☎ +41 793649583

✉ info@acde-europe.com

🌐 www.acde-europe.com





ADVANCED CONSTRUCTION & DEMOLITION EQUIPMENT





BEILITE® EUROPE BLTB-100A-5-W

HYDRAULIKHAMMER | HYRAULISCHE HAMER | MARTEAU HYDRAULIQUE | HYDRAULIC HAMMER

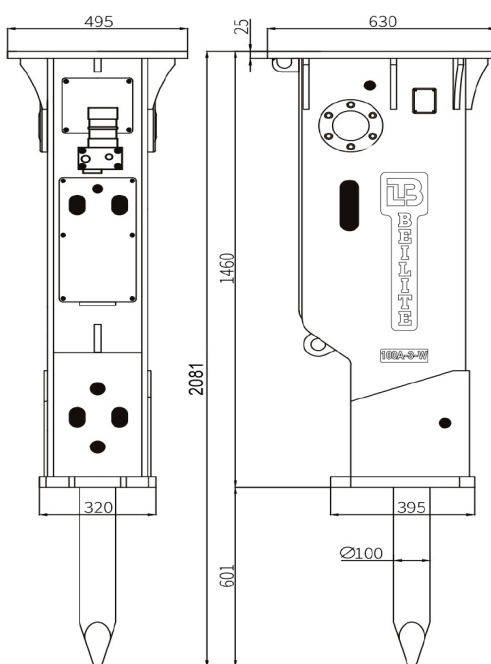

**standard
B®LUBE**



optional
B®TRACK&CHECK

Deutsch | Nederlands | **Français** | English

GESAMTGEWICHT WERKGEWICHT POIS EN ORDRE DE MARCHÉ WORKING WEIGHT 1*)	kg	1020
GESAMTLÄNGE LENGTE LONGUEUR TOTALE TOTAL LENGTH 2*)	mm	2081
BAGGERGRÖSSE GRAAFMACHINE KLASSE EXCAVATRICE APPLICABLE APPLICABLE EXCAVATOR	t	10~14
ÖLFLUSS OLIESTROOM DÉBIT D'HUILE WORKING OIL FLOW	l/min	80~110
BAGGER-EINSTELLDRUCK STEL DRUK GRAAFMACHINE PRESSION DE L'EXCAVATEUR SET PRESSURE EXCAVATOR	bar	210
BETRIEBSDRUCK WERKDRUK PRESSION DE FONCTIONNEMENT OPERATING PRESSURE	bar	150~170
SCHLAGFREQUENZ SLAGFREQUENTIE FRÉQUENCE D'IMPACT IMPACT RATE	bpm	350~700
WERKZEUGDURCHMESSER BEITEL DIAMETER DIAMÈTRE DU BURIN CHISEL DIAMETER	mm	100
WERKZEUGLÄNGE BEITEL LENGTE LONGUEUR DU BURIN CHISEL LENGTH	mm	1000
SCHLAUCHANSCHLUSS SLANG AANSluitING DIAMÈTRE DU TUYAU HOSE DIAMETER 10*)	inch	3/4
KOLBENSPEICHERDRUCK ZUIGERACCUMULATOR DRUCK PRESSION ACCUMULATEUR PISTON N2 PRESSURE (BACK HEAD)	bar	14~17
AKKUMULATORDRUCK ACCUMULATOR DRUCK PRESSION ACCUMULATEUR N2 PRESSURE (ACCUMULATOR)	bar	55~60
SCHALL 85DB(A)-ENTFERNUNG GELUID 85DB(A)-AFSTAND BRUIT 85DB(A)-DISTANCE NOISE 85DB(A)-DISTANCE	m	7~14
LOCHMUSTER GATENPATROON MODÈLE DE TROUS HOLE PATTERN		AC09
SCHRAUBENGROSSE BOUTGROOTTE TAILLE DE BOULON BOLT SIZE		M30
SCHMIERSYSTEM SMEERSYSTEEM SYSTÈME DE LUBRIFICATION AUTOMATIQUE AUTOMATIC GREASING SYSTEM		4*)
KABELLOSER DATENTRACKER DRAADLOZE GEGEVENSTRACKER TRACEURS DE DONNÉES SANS FIL WIRELESS DATA TRACKER		optional

1*) ARBEITSGEWICHT kann je nach Ausführung abweichen | GEWICHT Kan afhankelijk van de uitvoering afwijken | POIDS Peut varier selon l'exécution | WORKING WEIGHT may vary depending on the version 2*) GESAMTLÄNGE mit Meißel | TOTAALLENGTE met beitel | LONGUEUR TOTALE avec burin | TOTAL LENGTH with Chisel

3*) MINI B@LUBE SCHMIERSYSTEM optional | MINI B@LUBE SMEERSYSTEEM optioneel | MINI B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE optionnel | MINI B@LUBE AUTOMATIC GREASING SYSTEM optional

*4) R0L URE SCHMIERSYSTEM optional / MINI B0LBUE SMEERSYSTEEEM optioneel / MINI B0LBUE SYSTEME DE LUBRIFICATION AUTOMATIQUE optionnelle / MINI B0LBUE AUTOMATIC GREASING SYSTEM optional

5*) BI-B@LUBE SCHMIERSYSTEM standard | BI-B@LUBE SMEERSYSTEEM standaard | BI-B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE standard | BI-B@LUBE AUTOMATIC GREASING SYSTEM standard

5*) BI-B@LUBE SCHMIERSYSTEM standard | BI-B@LUBE SMEERSYSTEEM standaard | BI-B@LUBE SYSTEME DE LUBRIFICATION AUTOMATIQUE standard | BI-B@LUBE AUTOMATIC GREASING SYSTEM standard




ACDE® Europe

Netherlands ☎ +31 316 267291
Niederlande 📱 +31 6 53150283

Switzerland ☎ +41 625880164
Schweiz 📱 +41 793649583

ADVANCED CONSTRUCTION & DEMOLITION EQUIPMENT



✉ info@acde-europe.com
 🌐 www.acde-europe.com





BEILITE® EUROPE BLTB-125A-5-W

HYDRAULIKHAMMER | HYRAULISCHE HAMER | MARTEAU HYDRAULIQUE | HYDRAULIC HAMMER

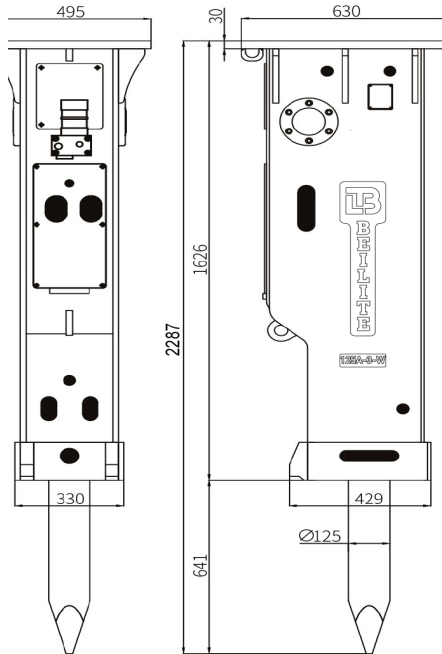

**standard
B®LUBE**



optional
B®TRACK&CHECK

Deutsch | Nederlands | **Français** | English

GESAMTGEWICHT WERKGEWICHT POIS EN ORDRE DE MARCHÉ WORKING WEIGHT 1*)	kg	1245
GESAMTLÄNGE LENGTE LONGUEUR TOTALE TOTAL LENGTH 2*)	mm	2287
BAGGERGRÖSSE GRAAFMACHINE KLASSE EXCAVATRICE APPLICABLE APPLICABLE EXCAVATOR	t	14~18
ÖLFLUSS OLIESTROOM DÉBIT D'HUILE WORKING OIL FLOW	l/min	90~120
BAGGER-EINSTELLDRUCK STEL DRUK GRAAFMACHINE PRESSION DE L'EXCAVATEUR SET PRESSURE EXCAVATOR	bar	210
BETRIEBSDRUCK WERKDRUK PRESSION DE FONCTIONNEMENT OPERATING PRESSURE	bar	150~170
SCHLAGFREQUENZ SLAGFREQUENTIE FRÉQUENCE D'IMPACT IMPACT RATE	bpm	350~650
WERKZEUGDURCHMESSER BEITEL DIAMETER DIAMÈTRE DU BURIN CHISEL DIAMETER	mm	125
WERKZEUGLÄNGE BEITEL LENGTE LONGUEUR DU BURIN CHISEL LENGTH	mm	1100
SCHLAUCHANSCHLUSS SLANG AANSluitING DIAMÈTRE DU TUYAU HOSE DIAMETER 10*)	inch	1
KOLBENSPEICHERDRUCK ZUIGERACCUMULATOR DRUCK PRESSION ACCUMULATEUR PISTON N2 PRESSURE (BACK HEAD)	bar	14~17
AKKUMULATORDRUCK ACCUMULATOR DRUCK PRESSION ACCUMULATEUR N2 PRESSURE (ACCUMULATOR)	bar	55~60
SCHALL 85DB(A)-ENTFERNUNG GELUID 85DB(A)-AFSTAND BRUIT 85DB(A)-DISTANCE NOISE 85DB(A)-DISTANCE	m	10~18
LOCHMUSTER GATENPATROON MODÈLE DE TROUS HOLE PATTERN		AC09
SCHRAUBENGROSSE BOUTGROOTTE TAILLE DE BOULON BOLT SIZE		M30
SCHMIERSYSTEM SMEERSYSTEEM SYSTÈME DE LUBRIFICATION AUTOMATIQUE AUTOMATIC GREASING SYSTEM		4*)
KABELLOSER DATENTRACKER DRAADLOZE GEGEVENSTRACKER TRACEURS DE DONNÉES SANS FIL WIRELESS DATA TRACKER		optional

1*) ARBEITSGEWICHT kann je nach Ausführung abweichen | GEWICHT Kan afhankelijk van de uitvoering afwijken | POIDS Peut varier selon l'exécution | WORKING WEIGHT may vary depending on the version 2*) GESAMTLÄNGE mit Meißel | TOTAALLENGTE met beitel | LONGUEUR TOTALE avec burin | TOTAL LENGTH with Chisel

3*) MINI B@LUBE SCHMIERSYSTEM optional | MINI B@LUBE SMEERSYSTEEM optioneel | MINI B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE optionnel | MINI B@LUBE AUTOMATIC GREASING SYSTEM optional

4*) B@LUBE SCHMIERSYSTEM standard | B@LUBE SMEERSYSTEEM standaard | B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE standard | B@LUBE AUTOMATIC GREASING SYSTEM standard

5*) BI-BOLUBE SCHMIERSYSTEM standard | BI-BOLUBE SMEERSYSTEEM standaard | BI-BOLUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE standard | BI-BOLUBE AUTOMATIC GREASING SYSTEM standard

5) BI-BOLUBE SCHMIERSYSTEM standard | BI-BOLUBE SMEERSYSTEM standaard | BI-BOLUBE SYSTEME DE LUBRIFICATION AUTOMATIQUE standard | BI-BOLUBE AUTOMATIC GREASING SYSTEM standard



ACDE® Europe


Netherlands ☎ +31 316 267291

Netherlands 🇳🇱 +31 6 53150283
Niederlande 🇳🇱 +31 6 53150283

Switzerland ☎ +41 625880164

Schweiz +41 793649583




✉ info@acde-europe.com
 🌐 www.acde-europe.com





BEILITE® EUROPE BLTB-135A-5-W

HYDRAULIKHAMMER | HYDRAULISCHE HAMER | MARTEAU HYDRAULIQUE | HYDRAULIC HAMMER

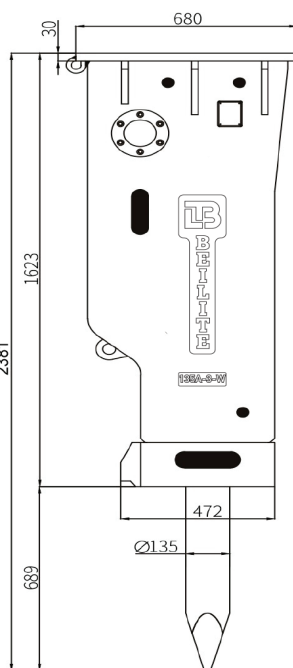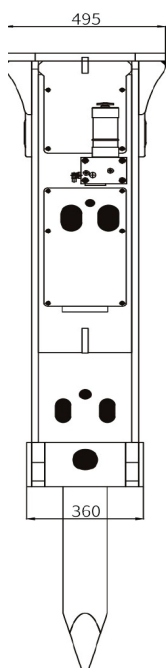

standard
B@LUBE



optional
B@TRACK&CHECK

Deutsch | Nederlands | Français | English

GESAMTGEWICHT WERKGEWICHT POIS EN ORDRE DE MARCHÉ WORKING WEIGHT 1*)	kg	1521
GESAMTLÄNGE LENGTE LONGUEUR TOTALE TOTAL LENGTH 2*)	mm	2381
BAGGERGRÖSSE GRAAFMACHINE KLASSE EXCAVATRICE APPLICABLE APPLICABLE EXCAVATOR	t	18-22
ÖLFLUSS OLIESTROOM DÉBIT D'HUILE WORKING OIL FLOW	l/min	120-180
BAGGER-EINSTELLDRIK STEL DRUK GRAAFMACHINE PRESSION DE L'EXCAVATEUR SET PRESSURE EXCAVATOR	bar	210
BETRIEBSDRUCK WERKDRUK PRESSION DE FONCTIONNEMENT OPERATING PRESSURE	bar	160-180
SCHLAGFREQUENZ SLAGFREQUENTIE FRÉQUENCE D'IMPACT IMPACT RATE	bpm	350-500
WERKZEUGDURCHMESSER BEITEL DIAMETER DIAMÈTRE DU BURIN CHISEL DIAMETER	mm	135
WERKZEUGLÄNGE BEITEL LENGTE LONGUEUR DU BURIN CHISEL LENGTH	mm	1200
SCHLAUCHANSCHLUSS SLANG AANSLUITING DIAMÈTRE DU TUYAU HOSE DIAMETER 10*)	inch	1
KOLBENSPEICHERDRUCK ZUIGERACCUMULATOR DRUCK PRESSION ACCUMULATEUR PISTON N2 PRESSURE (BACK HEAD)	bar	14-17
AKKUMULATORDRUCK ACCUMULATOR DRUCK PRESSION ACCUMULATEUR N2 PRESSURE (ACCUMULATOR)	bar	55-60
SCHALL 85DB(A)-ENTFERNUNG GELUID 85DB(A)-AFSTAND BRUIT 85DB(A)-DISTANCE NOISE 85DB(A)-DISTANCE	m	16-22
LOCHMUSTER GATENPATROON MODÈLE DE TROUS HOLE PATTERN		AC09
SCHRAUBENGROESSE BOUTGROOTTE TAILLE DE BOULON BOLT SIZE		M30
SCHMIERSYSTEM SMEERSYSTEEM SYSTÈME DE LUBRIFICATION AUTOMATIQUE AUTOMATIC GREASING SYSTEM		4*)
KABELLOSER DATENTRACKER DRAADLOZE GEGEVENSTRACKER TRACEURS DE DONNÉES SANS FIL WIRELESS DATA TRACKER		optional

1*) ARBEITSGEWICHT kann je nach Ausführung abweichen | GEWICHT Kan afhankelijk van de uitvoering afwijken | POIDS Peut varier selon l'exécution | WORKING WEIGHT may vary depending on the version 2*) GESAMTLÄNGE mit Meißel | TOTAALLENTE met beitel | LONGUEUR TOTALE avec burin | TOTAL LENGTH with Chisel

3*) MINI B@LUBE SCHMIERSYSTEM optional | MINI B@LUBE SMEERSYSTEEM optioneel | MINI B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE optionnel | MINI B@LUBE AUTOMATIC GREASING SYSTEM optional

4*) B@LUBE SCHMIERSYSTEM standard | B@LUBE SMEERSYSTEEM standaard | B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE standard | B@LUBE AUTOMATIC GREASING SYSTEM standard

5*) BI-B@LUBE SCHMIERSYSTEM standard | BI-B@LUBE SMEERSYSTEEM standaard | BI-B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE standard | BI-B@LUBE AUTOMATIC GREASING SYSTEM standard



ACDE® Europe

Netherlands ☎ +31 316 267291

Niederlande ☎ +31 6 53150283

Switzerland ☎ +41 625880164


Schweiz ☎ +41 793649583

✉ info@acde-europe.com

🌐 www.acde-europe.com






ADVANCED CONSTRUCTION & DEMOLITION EQUIPMENT





BEILITE® EUROPE BLTB-140A-5-W

HYDRAULIKHAMMER | HYDRAULISCHE HAMER | MARTEAU HYDRAULIQUE | HYDRAULIC HAMMER

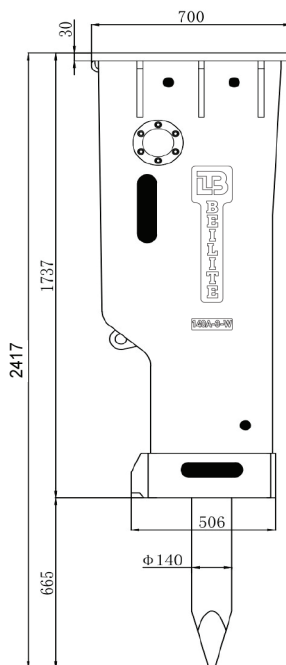

standard
B@LUBE



optional
B@TRACK&CHECK

Deutsch | Nederlands | Français | English

GESAMTGEWICHT WERKGEWICHT POIS EN ORDRE DE MARCHÉ WORKING WEIGHT 1*)	kg	1750
GESAMTLÄNGE LENGTE LONGUEUR TOTALE TOTAL LENGTH 2*)	mm	2417
BAGGERGRÖSSE GRAAFMACHINE KLASSE EXCAVATRICE APPLICABLE APPLICABLE EXCAVATOR	t	20-24
ÖLFLUSS OLIESTROOM DÉBIT D'HUILE WORKING OIL FLOW	l/min	120-180
BAGGER-EINSTELLDRIK STEL DRUK GRAAFMACHINE PRESSION DE L'EXCAVATEUR SET PRESSURE EXCAVATOR	bar	210
BETRIEBSDRUCK WERKDRUK PRESSION DE FONCTIONNEMENT OPERATING PRESSURE	bar	160-180
SCHLAGFREQUENZ SLAGFREQUENTIE FRÉQUENCE D'IMPACT IMPACT RATE	bpm	350-500
WERKZEUGDURCHMESSER BEITEL DIAMETER DIAMÈTRE DU BURIN CHISEL DIAMETER	mm	140
WERKZEUGLÄNGE BEITEL LENGTE LONGUEUR DU BURIN CHISEL LENGTH	mm	1250
SCHLAUCHANSCHLUSS SLANG AANSLUITING DIAMÈTRE DU TUYAU HOSE DIAMETER 10*)	inch	1
KOLBENSPEICHERDRUCK ZUIGERACCUMULATOR DRUCK PRESSION ACCUMULATEUR PISTON N2 PRESSURE (BACK HEAD)	bar	14-17
AKKUMULATORDRUCK ACCUMULATOR DRUCK PRESSION ACCUMULATEUR N2 PRESSURE (ACCUMULATOR)	bar	55-60
SCHALL 85DB(A)-ENTFERNUNG GELUID 85DB(A)-AFSTAND BRUIT 85DB(A)-DISTANCE NOISE 85DB(A)-DISTANCE	m	16-22
LOCHMUSTER GATENPATROON MODÈLE DE TROUS HOLE PATTERN		AC09
SCHRAUBENGRÖSSE BOUTGROOTTE TAILLE DE BOULON BOLT SIZE		M30
SCHMIERSYSTEM SMEERSYSTEEM SYSTÈME DE LUBRIFICATION AUTOMATIQUE AUTOMATIC GREASING SYSTEM		4*)
KABELLOSER DATENTRACKER DRAADLOZE GEGEVENSTRACKER TRACEURS DE DONNÉES SANS FIL WIRELESS DATA TRACKER		optional

1*) ARBEITSGEWICHT kann je nach Ausführung abweichen | GEWICHT Kan afhankelijk van de uitvoering afwijken | POIDS Peut varier selon l'exécution | WORKING WEIGHT may vary depending on the version 2*) GESAMTLÄNGE mit Meißel | TOTAALLENGTE met beitel | LONGUEUR TOTALE avec burin | TOTAL LENGTH with Chisel

3*) MINI B@LUBE SCHMIERSYSTEM optional | MINI B@LUBE SMEERSYSTEEM optioneel | MINI B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE optionnel | MINI B@LUBE AUTOMATIC GREASING SYSTEM optional

4*) B@LUBE SCHMIERSYSTEM standard | B@LUBE SMEERSYSTEEM standaard | B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE standard | B@LUBE AUTOMATIC GREASING SYSTEM standard

5*) BI-B@LUBE SCHMIERSYSTEM standard | BI-B@LUBE SMEERSYSTEEM standaard | BI-B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE standard | BI-B@LUBE AUTOMATIC GREASING SYSTEM standard



ACDE® Europe

Netherlands ☎ +31 316 267291

Niederlande ☎ +31 6 53150283

Switzerland ☎ +41 625880164


Schweiz ☎ +41 793649583

✉ info@acde-europe.com

🌐 www.acde-europe.com





ADVANCED CONSTRUCTION & DEMOLITION EQUIPMENT





BEILITE® EUROPE BLTB-150-5-W

HYDRAULIKHAMMER | HYRAULISCHE HAMER | MARTEAU HYDRAULIQUE | HYDRAULIC HAMMER

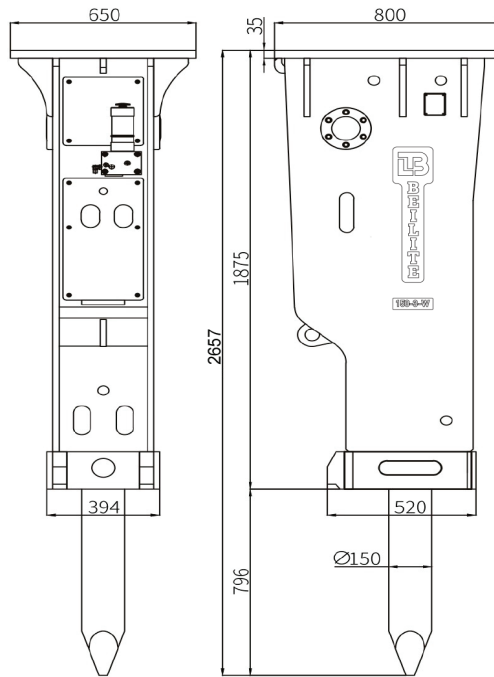

**standard
B®LUBE**



optional
B®TRACK&CHECK

Deutsch | Nederlands | **Français** | English

GESAMTGEWICHT WERKGEWICHT POIS EN ORDRE DE MARCHÉ WORKING WEIGHT 1*)	kg	2182
GESAMTLÄNGE LENGTE LONGUEUR TOTALE TOTAL LENGTH 2*)	mm	2657
BAGGERGRÖSSE GRAAFMACHINE KLASSE EXCAVATRICE APPLICABLE APPLICABLE EXCAVATOR	t	24~27
ÖLFLUSS OLIESTROOM DÉBIT D'HUILE WORKING OIL FLOW	l/min	150~210
BAGGER-EINSTELLDRUCK STEL DRUK GRAAFMACHINE PRESSION DE L'EXCAVATEUR SET PRESSURE EXCAVATOR	bar	230
BETRIEBSDRUCK WERKDRUK PRESSION DE FONCTIONNEMENT OPERATING PRESSURE	bar	180~200
SCHLAGFREQUENZ SLAGFREQUENTIE FRÉQUENCE D'IMPACT IMPACT RATE	bpm	200~300
WERKZEUGDURCHMESSER BEITEL DIAMETER DIAMÈTRE DU BURIN CHISEL DIAMETER	mm	150
WERKZEUGLÄNGE BEITEL LENGTE LONGUEUR DU BURIN CHISEL LENGTH	mm	1400
SCHLAUCHANSCHLUSS SLANG AANSLUITING DIAMÈTRE DU TUYAU HOSE DIAMETER 10*)	inch	1
KOLBENSPEICHERDRUCK ZUIGERACCUMULATOR DRUCK PRESSION ACCUMULATEUR PISTON N2 PRESSURE (BACK HEAD)	bar	17~20
AKKUMULATORDRUCK ACCUMULATOR DRUCK PRESSION ACCUMULATEUR N2 PRESSURE (ACCUMULATOR)	bar	55~60
SCHALL 85DB(A)-ENTFERNUNG GELUID 85DB(A)-AFSTAND BRUIT 85DB(A)-DISTANCE NOISE 85DB(A)-DISTANCE	m	21~30
LOCHMUSTER GATENPATROON MODÈLE DE TROUS HOLE PATTERN		AC09
SCHRAUBENGROSSE BOUTGROOTTE TAILLE DE BOULON BOLT SIZE		M30
SCHMIERSYSTEM SMEERSYSTEEM SYSTÈME DE LUBRIFICATION AUTOMATIQUE AUTOMATIC GREASING SYSTEM		4*)
KABELLOSER DATENTRACKER DRAADLOZE GEGEVENSTRACKER TRACEURS DE DONNÉES SANS FIL WIRELESS DATA TRACKER		optional

1*) ARBEITSGEWICHT kann je nach Ausführung abweichen | GEWICHT Kan afhankelijk van de uitvoering afwijken | POIDS Peut varier selon l'exécution | WORKING WEIGHT may vary depending on the version 2*) GESAMTLÄNGE mit Meißel | TOTAALLENGTE met beitel | LONGUEUR TOTALE avec burin | TOTAL LENGTH with Chisel

3*) MINI B@LUBE SCHMIERSYSTEM optional | MINI B@LUBE SMEERSYSTEEM optioneel | MINI B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE optionnel | MINI B@LUBE AUTOMATIC GREASING SYSTEM optional

4*) B@LUBE SCHMIERSYSTEM standard | B@LUBE SMEERSYSTEEM standaard | B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE standard | B@LUBE AUTOMATIC GREASING SYSTEM standard

5*) BI-BOLUBE SCHMIERSYSTEM standard | BI-BOLUBE SMEERSYSTEEM standaard | BI-BOLUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE standard | BI-BOLUBE AUTOMATIC GREASING SYSTEM standard

5*) BI-BOLUBE SCHMIERSYSTEM standard | BI-BOLUBE SMEERSYSTEEM standaard | BI-BOLUBE SYSTEME DE LUBRIFICATION AUTOMATIQUE standard | BI-BOLUBE AUTOMATIC GREASING SYSTEM standard





ACDE® Europe

Netherlands ☎ +31 316 267291
Niederlande 📱 +31 6 53150283

Switzerland ☎ +41 625880164
Schweiz 📠 +41 793649583



ADVANCED CONSTRUCTION & DEMOLITION EQUIPMENT





BEILITE® EUROPE BLTB-155-5-W

HYDRAULIKHAMMER | HYRAULISCHE HAMER | MARTEAU HYDRAULIQUE | HYDRAULIC HAMMER

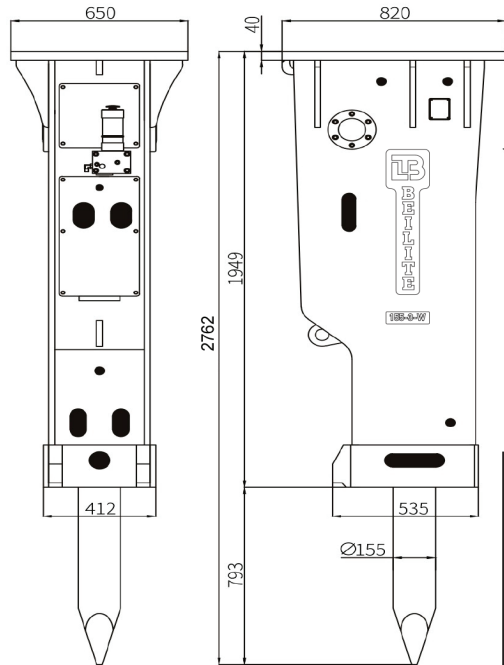

**standard
B®LUBE**

optional
B®TRACK&CHECK

Deutsch | Nederlands | **Français** | English

GESAMTGEWICHT WERKGEWICHT POIS EN ORDRE DE MARCHÉ WORKING WEIGHT 1*)	kg	2482
GESAMTLÄNGE LENGTE LONGUEUR TOTALE TOTAL LENGTH 2*)	mm	2762
BAGGERGRÖSSE GRAAFMACHINE KLASSE EXCAVATRICE APPLICABLE APPLICABLE EXCAVATOR	t	27~33
ÖLFLUSS OLIESTROOM DÉBIT D'HUILE WORKING OIL FLOW	l/min	180~240
BAGGER-EINSTELLDRUCK STEL DRUK GRAAFMACHINE PRESSION DE L'EXCAVATEUR SET PRESSURE EXCAVATOR	bar	250
BETRIEBSDRUCK WERKDRUK PRESSION DE FONCTIONNEMENT OPERATING PRESSURE	bar	200~220
SCHLAGFREQUENZ SLAGFREQUENTIE FRÉQUENCE D'IMPACT IMPACT RATE	bpm	200~300
WERKZEUGDURCHMESSER BEITEL DIAMETER DIAMÈTRE DU BURIN CHISEL DIAMETER	mm	155
WERKZEUGLÄNGE BEITEL LENGTE LONGUEUR DU BURIN CHISEL LENGTH	mm	1400
SCHLAUCHANSCHLUSS SLANG AANSluitING DIAMÈTRE DU TUYAU HOSE DIAMETER 10*)	inch	1
KOLBENSPEICHERDRUCK ZUIGERACCUMULATOR DRUCK PRESSION ACCUMULATEUR PISTON N2 PRESSURE (BACK HEAD)	bar	17~20
AKKUMULATORDRUCK ACCUMULATOR DRUCK PRESSION ACCUMULATEUR N2 PRESSURE (ACCUMULATOR)	bar	55~60
SCHALL 85DB(A)-ENTFERNUNG GELUID 85DB(A)-AFSTAND BRUIT 85DB(A)-DISTANCE NOISE 85DB(A)-DISTANCE	m	21~30
LOCHMUSTER GATENPATROON MODÈLE DE TROUS HOLE PATTERN		AC10
SCHRAUBENGROSSE BOUTGROOTTE TAILLE DE BOULON BOLT SIZE		M30
SCHMIERSYSTEM SMEERSYSTEEM SYSTÈME DE LUBRIFICATION AUTOMATIQUE AUTOMATIC GREASING SYSTEM		4*)
KABELLOSER DATENTRACKER DRAADLOZE GEGEVENSTRACKER TRACEURS DE DONNÉES SANS FIL WIRELESS DATA TRACKER		optional

1*) ARBEITSGEWICHT kann je nach Ausführung abweichen | GEWICHT Kan afhankelijk van de uitvoering afwijken | POIDS Peut varier selon l'exécution | WORKING WEIGHT may vary depending on the version 2*) GESAMTLÄNGE mit Meißel | TOTAALLENGTE met beitel | LONGUEUR TOTALE avec burin | TOTAL LENGTH with Chisel

3*) MINI B@LUBE SCHMIERSYSTEM optional | MINI B@LUBE SMEERSYSTEEM optioneel | MINI B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE optionnel | MINI B@LUBE AUTOMATIC GREASING SYSTEM optional

4*) B@LUBE SCHMIERSYSTEM standard | B@LUBE SMEERSYSTEEM standaard | B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE standard | B@LUBE AUTOMATIC GREASING SYSTEM standard

5*) BI-BOLUBE SCHMIERSYSTEM standard | BI-BOLUBE SMEERSYSTEEM standaard | BI-BOLUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE standard | BI-BOLUBE AUTOMATIC GREASING SYSTEM standard

5*) BI-BOLUBE SCHMIERSYSTEM standard | BI-BOLUBE SMEERSYSTEEM standaard | BI-BOLUBE SYSTEME DE LUBRIFICATION AUTOMATIQUE standard | BI-BOLUBE AUTOMATIC GREASING SYSTEM standard





ACDE® Europe

Netherlands ☎ +31 316 267291
Niederlande 📠 +31 6 53150283

Switzerland ☎ +41 625880164
Schweiz 📠 +41 793649583



ADVANCED CONSTRUCTION & DEMOLITION EQUIPMENT





BEILITE® EUROPE BLTB-165-5-W

HYDRAULIKHAMMER | HYDRAULISCHE HAMER | MARTEAU HYDRAULIQUE | HYDRAULIC HAMMER

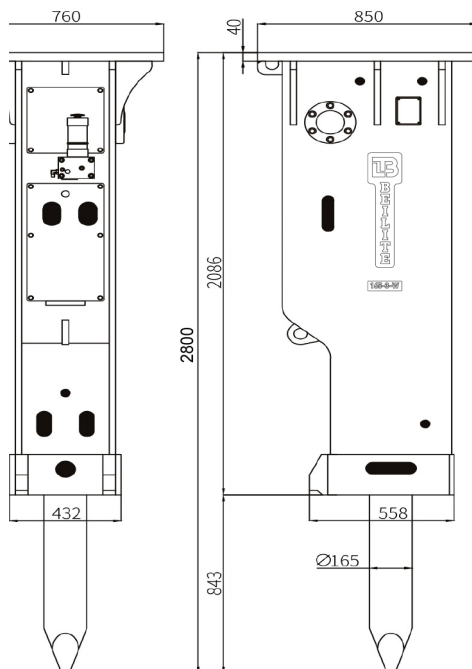

standard
B@LUBE



optional
B@TRACK&CHECK

Deutsch | Nederlands | Français | English

GESAMTGEWICHT WERKGEWICHT POIS EN ORDRE DE MARCHÉ WORKING WEIGHT 1*)	kg	2985
GESAMTLÄNGE LENGTE LONGUEUR TOTALE TOTAL LENGTH 2*)	mm	2800
BAGGERGRÖSSE GRAAFMACHINE KLASSE EXCAVATRICE APPLICABLE APPLICABLE EXCAVATOR	t	33-38
ÖLFLUSS OLIESTROOM DÉBIT D'HUILE WORKING OIL FLOW	l/min	200-260
BAGGER-EINSTELLDRUCK STEL DRUK GRAAFMACHINE PRESSION DE L'EXCAVATEUR SET PRESSURE EXCAVATOR	bar	260
BETRIEBSDRUCK WERKDRUK PRESSION DE FONCTIONNEMENT OPERATING PRESSURE	bar	210-230
SCHLAGFREQUENZ SLAGFREQUENTIE FRÉQUENCE D'IMPACT IMPACT RATE	bpm	150-300
WERKZEUGDURCHMESSER BEITEL DIAMETER DIAMÈTRE DU BURIN CHISEL DIAMETER	mm	165
WERKZEUGLÄNGE BEITEL LENGTE LONGUEUR DU BURIN CHISEL LENGTH	mm	1400
SCHLAUCHANSCHLUSS SLANG AANSLUITING DIAMÈTRE DU TUYAU HOSE DIAMETER 10*)	inch	1
KOLBENSPEICHERDRUCK ZUIGERACCUMULATOR DRUCK PRESSION ACCUMULATEUR PISTON N2 PRESSURE (BACK HEAD)	bar	18-22
AKKUMULATORDRUCK ACCUMULATOR DRUCK PRESSION ACCUMULATEUR N2 PRESSURE (ACCUMULATOR)	bar	55-60
SCHALL 85DB(A)-ENTFERNUNG GELUID 85DB(A)-AFSTAND BRUIT 85DB(A)-DISTANCE NOISE 85DB(A)-DISTANCE	m	26-35
LOCHMUSTER GATENPATROON MODÈLE DE TROUS HOLE PATTERN		AC11
SCHRAUBENGRÖSSE BOUTGROOTTE TAILLE DE BOULON BOLT SIZE		M30
SCHMIERSYSTEM SMEERSYSTEEM SYSTÈME DE LUBRIFICATION AUTOMATIQUE AUTOMATIC GREASING SYSTEM		4*)
KABELLOSER DATENTRACKER DRAADLOZE GEGEVENSTRACKER TRACEURS DE DONNÉES SANS FIL WIRELESS DATA TRACKER		optional

1*) ARBEITSGEWICHT kann je nach Ausführung abweichen | GEWICHT Kan afhankelijk van de uitvoering afwijken | POIDS Peut varier selon l'exécution | WORKING WEIGHT may vary depending on the version 2*) GESAMTLÄNGE mit Meißel | TOTAALLENTE met beitel | LONGUEUR TOTALE avec burin | TOTAL LENGTH with Chisel

3*) MINI B@LUBE SCHMIERSYSTEM optional | MINI B@LUBE SMEERSYSTEEM optioneel | MINI B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE optionnel | MINI B@LUBE AUTOMATIC GREASING SYSTEM optional

4*) B@LUBE SCHMIERSYSTEM standard | B@LUBE SMEERSYSTEEM standaard | B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE standard | B@LUBE AUTOMATIC GREASING SYSTEM standard

5*) BI-B@LUBE SCHMIERSYSTEM standard | BI-B@LUBE SMEERSYSTEEM standaard | BI-B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE standard | BI-B@LUBE AUTOMATIC GREASING SYSTEM standard



ACDE® Europe

Netherlands ☎ +31 316 267291

Niederlande ☎ +31 6 53150283

Switzerland ☎ +41 625880164


Schweiz ☎ +41 793649583

✉ info@acde-europe.com

🌐 www.acde-europe.com





ADVANCED CONSTRUCTION & DEMOLITION EQUIPMENT





BEILITE® EUROPE BLTB-175L-5-W

HYDRAULIKHAMMER | HYDRAULISCHE HAMER | MARTEAU HYDRAULIQUE | HYDRAULIC HAMMER

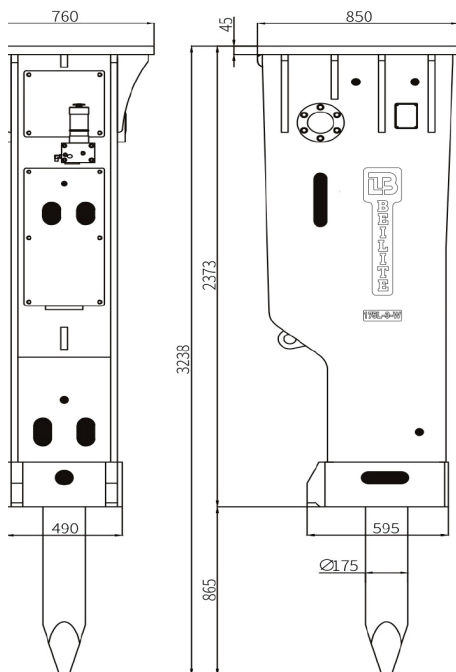

standard
BI-B@LUBE



standard
B@TRACK&CHECK

Deutsch | Nederlands | Français | English

GESAMTGEWICHT WERKGEWICHT POIS EN ORDRE DE MARCHÉ WORKING WEIGHT 1*)	kg	4107
GESAMTLÄNGE LENGTE LONGUEUR TOTALE TOTAL LENGTH 2*)	mm	3238
BAGGERGRÖSSE GRAAFMACHINE KLASSE EXCAVATRICE APPLICABLE APPLICABLE EXCAVATOR	t	40-50
ÖLFLUSS OLIESTROOM DÉBIT D'HUILE WORKING OIL FLOW	l/min	220-270
BAGGER-EINSTELLDRUCK STEL DRUK GRAAFMACHINE PRESSION DE L'EXCAVATEUR SET PRESSURE EXCAVATOR	bar	280
BETRIEBSDRUCK WERKDRUK PRESSION DE FONCTIONNEMENT OPERATING PRESSURE	bar	230-250
SCHLAGFREQUENZ SLAGFREQUENTIE FRÉQUENCE D'IMPACT IMPACT RATE	bpm	130-200
WERKZEUGDURCHMESSER BEITEL DIAMETER DIAMÈTRE DU BURIN CHISEL DIAMETER	mm	175
WERKZEUGLÄNGE BEITEL LENGTE LONGUEUR DU BURIN CHISEL LENGTH	mm	1450
SCHLAUCHANSCHLUSS SLANG AANSLUITING DIAMÈTRE DU TUYAU HOSE DIAMETER 10*)	inch	1 1/4
KOLBENSPEICHERDRUCK ZUIGERACCUMULATOR DRUCK PRESSION ACCUMULATEUR PISTON N2 PRESSURE (BACK HEAD)	bar	25-28
AKKUMULATORDRUCK ACCUMULATOR DRUCK PRESSION ACCUMULATEUR N2 PRESSURE (ACCUMULATOR)	bar	55-60
SCHALL 85DB(A)-ENTFERNUNG GELUID 85DB(A)-AFSTAND BRUIT 85DB(A)-DISTANCE NOISE 85DB(A)-DISTANCE	m	35-40
LOCHMUSTER GATENPATROON MODÈLE DE TROUS HOLE PATTERN		AC11
SCHRAUBENGROESSE BOUTGROOTTE TAILLE DE BOULON BOLT SIZE		M36
SCHMIERSYSTEM SMEERSYSTEEM SYSTÈME DE LUBRIFICATION AUTOMATIQUE AUTOMATIC GREASING SYSTEM		5*)
KABELLOSER DATENTRACKER DRAADLOZE GEGEVENSTRACKER TRACEURS DE DONNÉES SANS FIL WIRELESS DATA TRACKER		standard

1*) ARBEITSGEWICHT kann je nach Ausführung abweichen | GEWICHT Kan afhankelijk van de uitvoering afwijken | POIDS Peut varier selon l'exécution | WORKING WEIGHT may vary depending on the version 2*) GESAMTLÄNGE mit Meißel | TOTAALLENTE met beitel | LONGUEUR TOTALE avec burin | TOTAL LENGTH with Chisel

3*) MINI B@LUBE SCHMIERSYSTEM optional | MINI B@LUBE SMEERSYSTEEM optioneel | MINI B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE optionnel | MINI B@LUBE AUTOMATIC GREASING SYSTEM optional

4*) B@LUBE SCHMIERSYSTEM standard | B@LUBE SMEERSYSTEEM standaard | B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE standard | B@LUBE AUTOMATIC GREASING SYSTEM standard

5*) BI-B@LUBE SCHMIERSYSTEM standard | BI-B@LUBE SMEERSYSTEEM standaard | BI-B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE standard | BI-B@LUBE AUTOMATIC GREASING SYSTEM standard



ACDE® Europe

Netherlands ☎ +31 316 267291

Niederlande ☎ +31 6 53150283

Switzerland ☎ +41 625880164


Schweiz ☎ +41 793649583

✉ info@acde-europe.com

🌐 www.acde-europe.com






ADVANCED CONSTRUCTION & DEMOLITION EQUIPMENT





BEILITE® EUROPE BLTB-190-5-W

HYDRAULIKHAMMER | HYDRAULISCHE HAMER | MARTEAU HYDRAULIQUE | HYDRAULIC HAMMER

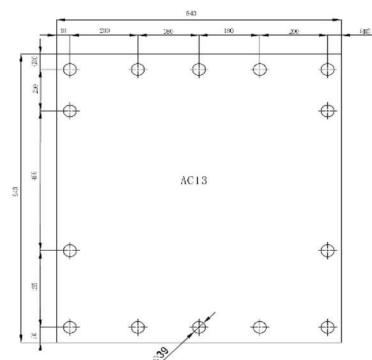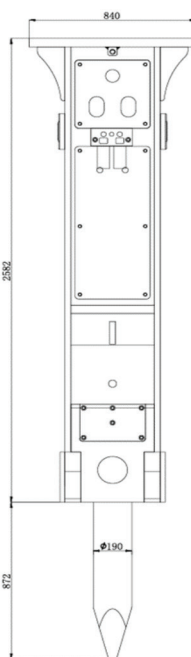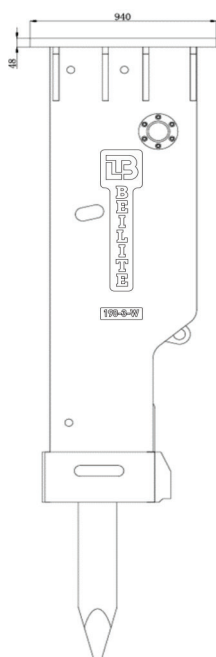

standard
BI-B@LUBE



standard
B@TRACK&CHECK

Deutsch | Nederlands | Français | English

GESAMTGEWICHT WERKGEWICHT POIS EN ORDRE DE MARCHÉ WORKING WEIGHT 1*)	kg	4990
GESAMTLÄNGE LENGTE LONGUEUR TOTALE TOTAL LENGTH 2*)	mm	3334
BAGGERGRÖSSE GRAAFMACHINE KLASSE EXCAVATRICE APPLICABLE APPLICABLE EXCAVATOR	t	45-55
ÖLFLUSS OLIESTROOM DÉBIT D'HUILE WORKING OIL FLOW	l/min	240-290
BAGGER-EINSTELLDRUCK STEL DRUK GRAAFMACHINE PRESSION DE L'EXCAVATEUR SET PRESSURE EXCAVATOR	bar	300
BETRIEBSDRUCK WERKDRUK PRESSION DE FONCTIONNEMENT OPERATING PRESSURE	bar	250-270
SCHLAGFREQUENZ SLAGFREQUENTIE FRÉQUENCE D'IMPACT IMPACT RATE	bpm	100-140
WERKZEUGDURCHMESSER BEITEL DIAMETER DIAMÈTRE DU BURIN CHISEL DIAMETER	mm	190
WERKZEUGLÄNGE BEITEL LENGTE LONGUEUR DU BURIN CHISEL LENGTH	mm	1500
SCHLAUCHANSCHLUSS SLANG AANSLUITING DIAMÈTRE DU TUYAU HOSE DIAMETER 10*)	inch	1 1/4
KOLBENSPEICHERDRUCK ZUIGERACCUMULATOR DRUCK PRESSION ACCUMULATEUR PISTON N2 PRESSURE (BACK HEAD)	bar	27-30
AKKUMULATORDRUCK ACCUMULATOR DRUCK PRESSION ACCUMULATEUR N2 PRESSURE (ACCUMULATOR)	bar	65-70
SCHALL 85DB(A)-ENTFERNUNG GELUID 85DB(A)-AFSTAND BRUIT 85DB(A)-DISTANCE NOISE 85DB(A)-DISTANCE	m	38-45
LOCHMUSTER GATENPATROON MODÈLE DE TROUS HOLE PATTERN		AC13
SCHRAUBENGROSSE BOUTGROOTTE TAILLE DE BOULON BOLT SIZE		M36
SCHMIERSYSTEM SMEERSYSTEEM SYSTÈME DE LUBRIFICATION AUTOMATIQUE AUTOMATIC GREASING SYSTEM		5*)
KABELLOSER DATENTRACKER DRAADLOZE GEGEVENSTRACKER TRACEURS DE DONNÉES SANS FIL WIRELESS DATA TRACKER		standard

1*) ARBEITSGEWICHT kann je nach Ausführung abweichen | GEWICHT Kan afhankelijk van de uitvoering afwijken | POIDS Peut varier selon l'exécution | WORKING WEIGHT may vary depending on the version 2*) GESAMTLÄNGE mit Meißel | TOTAALLENTE met beitel | LONGUEUR TOTALE avec burin | TOTAL LENGTH with Chisel

3*) MINI B@LUBE SCHMIERSYSTEM optional | MINI B@LUBE SMEERSYSTEEM optioneel | MINI B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE optionnel | MINI B@LUBE AUTOMATIC GREASING SYSTEM optional

4*) B@LUBE SCHMIERSYSTEM standard | B@LUBE SMEERSYSTEEM standaard | B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE standard | B@LUBE AUTOMATIC GREASING SYSTEM standard

5*) BI-B@LUBE SCHMIERSYSTEM standard | BI-B@LUBE SMEERSYSTEEM standaard | BI-B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE standard | BI-B@LUBE AUTOMATIC GREASING SYSTEM standard



ACDE® Europe

Netherlands ☎ +31 316 267291

Niederlande ☎ +31 6 53150283

Switzerland ☎ +41 625880164


Schweiz ☎ +41 793649583

✉ info@acde-europe.com

🌐 www.acde-europe.com






ADVANCED CONSTRUCTION & DEMOLITION EQUIPMENT





BEILITE® EUROPE BLTB-195-5-W

HYDRAULIKHAMMER | HYRAULISCHE HAMER | MARTEAU HYDRAULIQUE | HYDRAULIC HAMMER

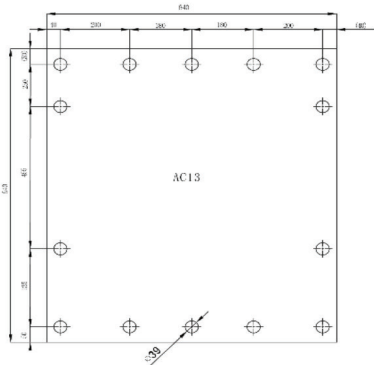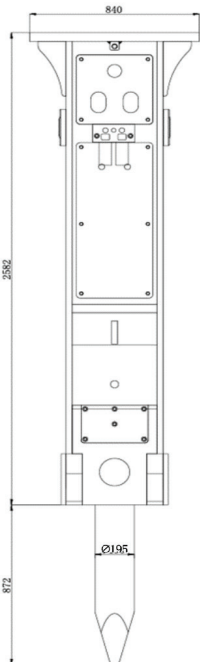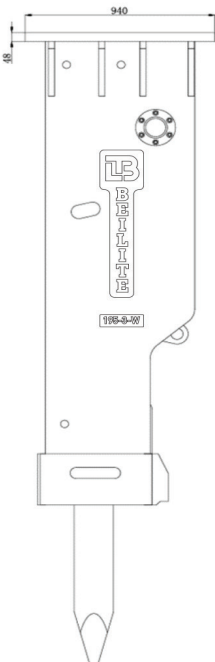

standard
BI-B@LUBE



standard
B@TRACK&CHECK

Deutsch | Nederlands | Francais | English

GESAMTGEWICHT WERKGEWICHT POIS EN ORDRE DE MARCHÉ WORKING WEIGHT 1*)	kg	5120
GESAMTLÄNGE LENGTE LONGUEUR TOTALE TOTAL LENGTH 2*)	mm	3454
BAGGERGRÖSSE GRAAFMACHINE KLASSE EXCAVATRICE APPLICABLE APPLICABLE EXCAVATOR	t	50-60
ÖLFLUSS OLIESTROOM DÉBIT D'HUILE WORKING OIL FLOW	l/min	260-310
BAGGER-EINSTELLDRIK STEL DRIK GRAAFMACHINE PRESSION DE L'EXCAVATEUR SET PRESSURE EXCAVATOR	bar	310
BETRIEBSDRIK WERKDRIK PRESSION DE FONCTIONNEMENT OPERATING PRESSURE	bar	260-280
SCHLAGFREQUENZ SLAGFREQUENTIE FRÉQUENCE D'IMPACT IMPACT RATE	bpm	100-140
WERKZEUGDURCHMESSER BEITEL DIAMETER DIAMÈTRE DU BURIN CHISEL DIAMETER	mm	195
WERKZEUGLÄNGE BEITEL LENGTE LONGUEUR DU BURIN CHISEL LENGTH	mm	1600
SCHLAUCHANSCHLUSS SLANG AANSLUITING DIAMÈTRE DU TUYAU HOSE DIAMETER 10*)	inch	1 1/4
KOLBENSPEICHERDRIK ZUIGERACCUMULATOR DRIK PRESSION ACCUMULATEUR PISTON N2 PRESSURE (BACK HEAD)	bar	30-33
AKKUMULATORDRIK ACCUMULATOR DRIK PRESSION ACCUMULATEUR N2 PRESSURE (ACCUMULATOR)	bar	65-70
SCHALL 85DB(A)-ENTFERNUNG GELUID 85DB(A)-AFSTAND BRUIT 85DB(A)-DISTANCE NOISE 85DB(A)-DISTANCE	m	45-50
LOCHMUSTER GATENPATROON MODÈLE DE TROUS HOLE PATTERN		AC13
SCHRAUBENGROESSE BOUTGROOTTE TAILLE DE BOULON BOLT SIZE		M36
SCHMIERSYSTEM SMEERSYSTEEM SYSTÈME DE LUBRIFICATION AUTOMATIQUE AUTOMATIC GREASING SYSTEM		5*)
KABELLOSER DATENTRACKER DRAADLOZE GEGEVENSTRACKER TRACEURS DE DONNÉES SANS FIL WIRELESS DATA TRACKER		standard


1*) ARBEITSGEWICHT kann je nach Ausführung abweichen | GEWICHT Kan afhankelijk van de uitvoering afwijken | POIDS Peut varier selon l'exécution | WORKING WEIGHT may vary depending on the version 2*) GESAMTLÄNGE mit Meißel | TOTAALLENGTE met beitel | LONGUEUR TOTALE avec burin | TOTAL LENGTH with Chisel 3*) MINI B@LUBE SCHMIERSYSTEM optional | MINI B@LUBE SMEERSYSTEEM optioneel | MINI B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE optionnel | MINI B@LUBE AUTOMATIC GREASING SYSTEM optional 4*) B@LUBE SCHMIERSYSTEM standard | B@LUBE SMEERSYSTEEM standaard | B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE standard | B@LUBE AUTOMATIC GREASING SYSTEM standard 5*) BI-B@LUBE SCHMIERSYSTEM standard | BI-B@LUBE SMEERSYSTEEM standaard | BI-B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE standard | BI-B@LUBE AUTOMATIC GREASING SYSTEM standard



ACDE® Europe
Netherlands ☎ +31 316 267291 ✉ info@acde-europe.com
Niederlande ☎ +31 6 53150283 🌐 www.acde-europe.com
Switzerland ☎ +41 625880164
Schweiz ☎ +41 793649583





ADVANCED CONSTRUCTION & DEMOLITION EQUIPMENT





BEILITE® EUROPE BLTB-200-5-W

HYDRAULIKHAMMER | HYDRAULISCHE HAMER | MARTEAU HYDRAULIQUE | HYDRAULIC HAMMER

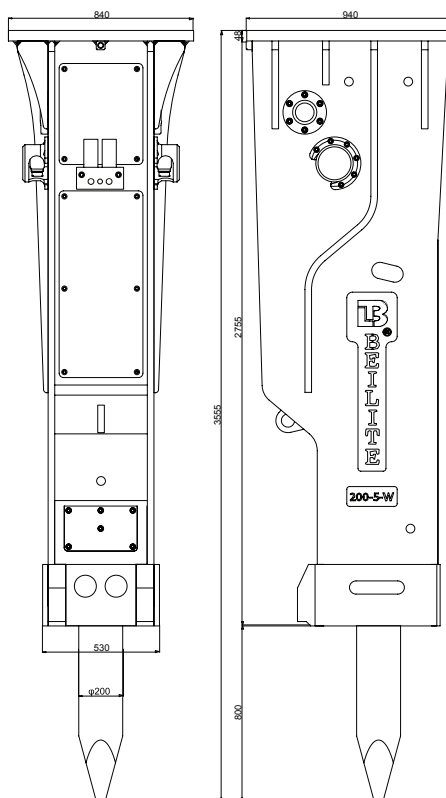

standard
BI-B@LUBE



standard
B@TRACK&CHECK

Deutsch | Nederlands | Français | English

GESAMTGEWICHT WERKGEWICHT POIS EN ORDRE DE MARCHÉ WORKING WEIGHT 1*)	kg	5240
GESAMTLÄNGE LENGTE LONGUEUR TOTALE TOTAL LENGTH 2*)	mm	3555
BAGGERGRÖSSE GRAAFMACHINE KLASSE EXCAVATRICE APPLICABLE APPLICABLE EXCAVATOR	t	50-65
ÖLFLUSS OLIESTROOM DÉBIT D'HUILE WORKING OIL FLOW	l/min	280-330
BAGGER-EINSTELLDRIK STEL DRUK GRAAFMACHINE PRESSION DE L'EXCAVATEUR SET PRESSURE EXCAVATOR	bar	330
BETRIEBSDRUCK WERKDRUK PRESSION DE FONCTIONNEMENT OPERATING PRESSURE	bar	280-300
SCHLAGFREQUENZ SLAGFREQUENTIE FRÉQUENCE D'IMPACT IMPACT RATE	bpm	100-130
WERKZEUGDURCHMESSER BEITEL DIAMETER DIAMÈTRE DU BURIN CHISEL DIAMETER	mm	200
WERKZEUGLÄNGE BEITEL LENGTE LONGUEUR DU BURIN CHISEL LENGTH	mm	1620
SCHLAUCHANSCHLUSS SLANG AANSLUITING DIAMÈTRE DU TUYAU HOSE DIAMETER 10*)	inch	1 1/4
KOLBENSPEICHERDRUCK ZUIGERACCUMULATOR DRUCK PRESSION ACCUMULATEUR PISTON N2 PRESSURE (BACK HEAD)	bar	27-30
AKKUMULATORDRUCK ACCUMULATOR DRUCK PRESSION ACCUMULATEUR N2 PRESSURE (ACCUMULATOR)	bar	65-70
SCHALL 85DB(A)-ENTFERNUNG GELUID 85DB(A)-AFSTAND BRUIT 85DB(A)-DISTANCE NOISE 85DB(A)-DISTANCE	m	50-55
LOCHMUSTER GATENPATROON MODÈLE DE TROUS HOLE PATTERN		AC15
SCHRAUBENGROESSE BOUTGROOTTE TAILLE DE BOULON BOLT SIZE		M36
SCHMIERSYSTEM SMEERSYSTEEM SYSTÈME DE LUBRIFICATION AUTOMATIQUE AUTOMATIC GREASING SYSTEM		5*)
KABELLOSER DATENTRACKER DRAADLOZE GEGEVENSTRACKER TRACEURS DE DONNÉES SANS FIL WIRELESS DATA TRACKER		standard

1*) ARBEITSGEWICHT kann je nach Ausführung abweichen | GEWICHT Kan afhankelijk van de uitvoering afwijken | POIDS Peut varier selon l'exécution | WORKING WEIGHT may vary depending on the version 2*) GESAMTLÄNGE mit Meißel | TOTAALLENTE met beitel | LONGUEUR TOTALE avec burin | TOTAL LENGTH with Chisel

3*) MINI B@LUBE SCHMIERSYSTEM optional | MINI B@LUBE SMEERSYSTEEM optioneel | MINI B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE optionnel | MINI B@LUBE AUTOMATIC GREASING SYSTEM optional

4*) B@LUBE SCHMIERSYSTEM standard | B@LUBE SMEERSYSTEEM standaard | B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE standard | B@LUBE AUTOMATIC GREASING SYSTEM standard

5*) BI-B@LUBE SCHMIERSYSTEM standard | BI-B@LUBE SMEERSYSTEEM standaard | BI-B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE standard | BI-B@LUBE AUTOMATIC GREASING SYSTEM standard



ACDE® Europe

Netherlands ☎ +31 316 267291

Niederlande ☎ +31 6 53150283

Switzerland ☎ +41 625880164


Schweiz ☎ +41 793649583

✉ info@acde-europe.com

🌐 www.acde-europe.com






ADVANCED CONSTRUCTION & DEMOLITION EQUIPMENT





BEILITE® EUROPE BLTB-205-5-W

HYDRAULIKHAMMER | HYDRAULISCHE HAMER | MARTEAU HYDRAULIQUE | HYDRAULIC HAMMER

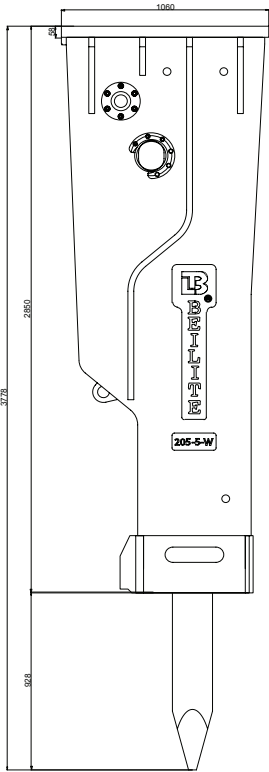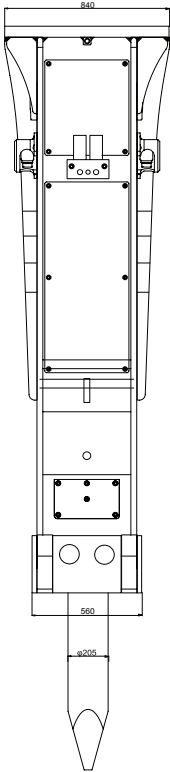

standard
BI-B@LUBE



standard
B@TRACK&CHECK


Deutsch | Nederlands | Français | English

GESAMTGEWICHT WERKGEWICHT POIS EN ORDRE DE MARCHÉ WORKING WEIGHT 1*)	kg	6532
GESAMTLÄNGE LENGTE LONGUEUR TOTALE TOTAL LENGTH 2*)	mm	3778
BAGGERGRÖSSE GRAAFMACHINE KLASSE EXCAVATRICE APPLICABLE APPLICABLE EXCAVATOR	t	55-65
ÖLFLUSS OLIESTROOM DÉBIT D'HUILE WORKING OIL FLOW	l/min	320-380
BAGGER-EINSTELLDRIK STEL DRUK GRAAFMACHINE PRESSION DE L'EXCAVATEUR SET PRESSURE EXCAVATOR	bar	330
BETRIEBSDRUK WERKDRUK PRESSION DE FONCTIONNEMENT OPERATING PRESSURE	bar	280-300
SCHLAGFREQUENZ SLAGFREQUENTIE FRÉQUENCE D'IMPACT IMPACT RATE	bpm	100-130
WERKZEUGDURCHMESSER BEITEL DIAMETER DIAMÈTRE DU BURIN CHISEL DIAMETER	mm	205
WERKZEUGLÄNGE BEITEL LENGTE LONGUEUR DU BURIN CHISEL LENGTH	mm	1750
SCHLAUCHANSCHLUSS SLANG AANSLUITING DIAMÈTRE DU TUYAU HOSE DIAMETER 10*)	inch	1 1/2
KOLBENSPEICHERDRUK ZUIGERACCUMULATOR DRUK PRESSION ACCUMULATEUR PISTON N2 PRESSURE (BACK HEAD)	bar	32-35
AKKUMULATORDRUK ACCUMULATOR DRUK PRESSION ACCUMULATEUR N2 PRESSURE (ACCUMULATOR)	bar	75-80
SCHALL 85DB(A)-ENTFERNUNG GELUID 85DB(A)-AFSTAND BRUIT 85DB(A)-DISTANCE NOISE 85DB(A)-DISTANCE	m	50-55
LOCHMUSTER GATENPATROON MODÈLE DE TROUS HOLE PATTERN		AC14
SCHRAUBENGROESSE BOUTGROOTTE TAILLE DE BOULON BOLT SIZE		M36
SCHMIERSYSTEM SMEERSYSTEEM SYSTÈME DE LUBRIFICATION AUTOMATIQUE AUTOMATIC GREASING SYSTEM		5*)
KABELLOSER DATENTRACKER DRAADLOZE GEGEVENSTRACKER TRACEURS DE DONNÉES SANS FIL WIRELESS DATA TRACKER		standard

1*) ARBEITSGEWICHT kann je nach Ausführung abweichen | GEWICHT Kan afhankelijk van de uitvoering afwijken | POIDS Peut varier selon l'exécution | WORKING WEIGHT may vary depending on the version 2*) GESAMTLÄNGE mit Meißel | TOTAALLENTE met beitel | LONGUEUR TOTALE avec burin | TOTAL LENGTH with Chisel
3*) MINI B@LUBE SCHMIERSYSTEM optional | MINI B@LUBE SMEERSYSTEEM optioneel | MINI B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE optionnel | MINI B@LUBE AUTOMATIC GREASING SYSTEM optional
4*) B@LUBE SCHMIERSYSTEM standard | B@LUBE SMEERSYSTEEM standaard | B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE standard | B@LUBE AUTOMATIC GREASING SYSTEM standard
5*) BI-B@LUBE SCHMIERSYSTEM standard | BI-B@LUBE SMEERSYSTEEM standaard | BI-B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE standard | BI-B@LUBE AUTOMATIC GREASING SYSTEM standard






ACDE® Europe
Netherlands ☎ +31 316 267291
Niederlande ☎ +31 6 53150283
Switzerland ☎ +41 625880164
Schweiz ☎ +41 793649583
info@acde-europe.com
www.acde-europe.com
EDA OPEN S





BEILITE® EUROPE BLTB-210L-5-W

HYDRAULIKHAMMER | HYRAULISCHE HAMER | MARTEAU HYDRAULIQUE | HYDRAULIC HAMMER

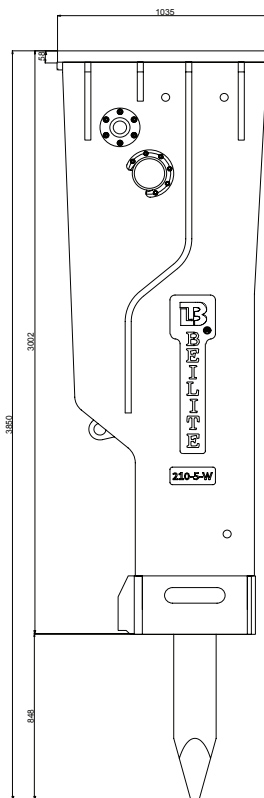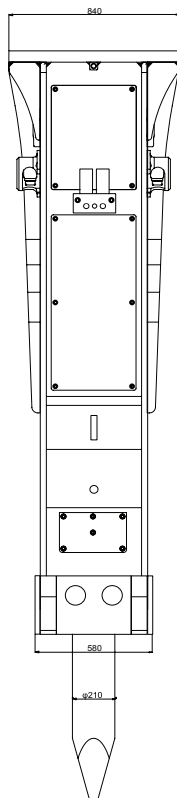

**standard
BI-B®LUBE**



standard
B® TRACK & CHECK

Deutsch | Nederlands | **Français** | English

GESAMTGEWICHT WERKGEWICHT POIS EN ORDRE DE MARCHÉ WORKING WEIGHT 1*)	kg	7253
GESAMTLÄNGE LENGTE LONGUEUR TOTALE TOTAL LENGTH 2*)	mm	3850
BAGGERGRÖSSE GRAAFMACHINE KLASSE EXCAVATRICE APPLICABLE APPLICABLE EXCAVATOR	t	65~75
ÖLFLUSS OLIESTROOM DÉBIT D'HUILE WORKING OIL FLOW	l/min	340~400
BAGGER-EINSTELLDRUCK STEL DRUK GRAAFMACHINE PRESSION DE L'EXCAVATEUR SET PRESSURE EXCAVATOR	bar	330
BETRIEBSDRUCK WERKDRUK PRESSION DE FONCTIONNEMENT OPERATING PRESSURE	bar	280~300
SCHLAGFREQUENZ SLAGFREQUENTIE FRÉQUENCE D'IMPACT IMPACT RATE	bpm	90~120
WERKZEUGDURCHMESSER BEITEL DIAMETER DIAMÈTRE DU BURIN CHISEL DIAMETER	mm	210
WERKZEUGLÄNGE BEITEL LENGTE LONGUEUR DU BURIN CHISEL LENGTH	mm	1800
SCHLAUCHANSCHLUSS SLANG AANSluitING DIAMÈTRE DU TUYAU HOSE DIAMETER 10*)	inch	1 1/2
KOLBENSPEICHERDRUCK ZUIGERACCUMULATOR DRUCK PRESSION ACCUMULATEUR PISTON N2 PRESSURE (BACK HEAD)	bar	32~35
AKKUMULATORDRUCK ACCUMULATOR DRUCK PRESSION ACCUMULATEUR N2 PRESSURE (ACCUMULATOR)	bar	75~80
SCHALL 85DB(A)-ENTFERNUNG GELUID 85DB(A)-AFSTAND BRUIT 85DB(A)-DISTANCE NOISE 85DB(A)-DISTANCE	m	50~55
LOCHMUSTER GATENPATROON MODÈLE DE TROUS HOLE PATTERN		AC014
SCHRAUBENGROSSE BOUTGROOTTE TAILLE DE BOULON BOLT SIZE		M36
SCHMIERSYSTEM SMEERSYSTEEM SYSTÈME DE LUBRIFICATION AUTOMATIQUE AUTOMATIC GREASING SYSTEM		5*)
KABELLOSER DATENTRACKER DRAADLOZE GEGEVENSTRACKER TRACEURS DE DONNÉES SANS FIL WIRELESS DATA TRACKER		standard

1*) ARBEITSGEWICHT kann je nach Ausführung abweichen | GEWICHT Kan afhankelijk van de uitvoering afwijken | POIDS Peut varier selon l'exécution | WORKING WEIGHT may vary depending on the version 2*) GESAMTLÄNGE mit Meißel | TOTAALLENGTE met beitel | LONGUEUR TOTALE avec burin | TOTAL LENGTH with Chisel

3*) MINI B@LUBE SCHMIERSYSTEM optional | MINI B@LUBE SMEERSYSTEEM optioneel | MINI B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE optionnel | MINI B@LUBE AUTOMATIC GREASING SYSTEM optional

4*) B@LUBE SCHMIERSYSTEM standard | B@LUBE SMEERSYSTEEM standaard | B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE standard | B@LUBE AUTOMATIC GREASING SYSTEM standard

BI-B@LUBE SCHMIERSYSTEM standard | BI-B@LUBE SMEERSYSTEEM standaard | BI-B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE standard | BI-B@LUBE AUTOMATIC GREASING SYSTEM standard

5) BI-BOLUBE SCHMIERSYSTEM standard | BI-BOLUBE SMEERSYSTEEM standaard | BI-BOLUBE SYSTEME DE LUBRIFICATION AUTOMATIQUE standard | BI-BOLUBE AUTOMATIC GREASING SYSTEM standard



ACDE® Europe

Netherlands ☎ +31 316 267291


Netherlands 📞 +31 316 207291
Niederlande 📞 +31 6 53150283

Switzerland ☎ +41 625880164

Schweiz +41 793649583

✉ info@acde-europe.com
 🌐 www.acde-europe.com




 www.acde-europe.com





BEILITE® EUROPE BLTB-215-5-W

HYDRAULIKHAMMER | HYDRAULISCHE HAMER | MARTEAU HYDRAULIQUE | HYDRAULIC HAMMER

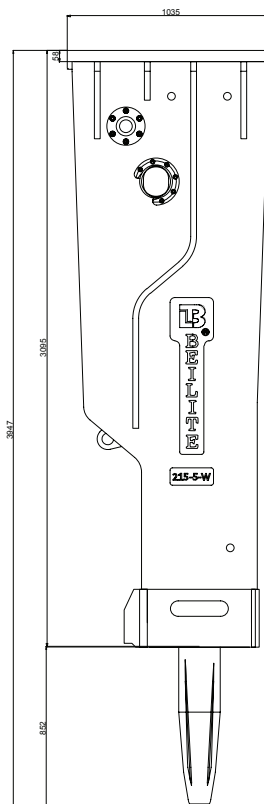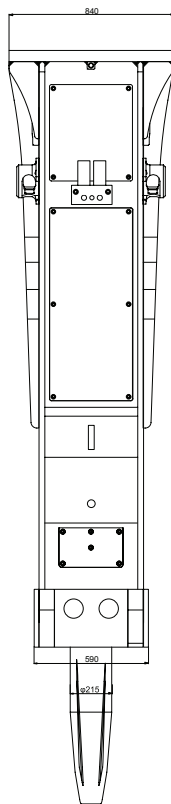

standard
BI-B@LUBE



standard
B@TRACK&CHECK

Deutsch | Nederlands | Français | English

GESAMTGEWICHT WERKGEWICHT POIS EN ORDRE DE MARCHÉ WORKING WEIGHT 1*)	kg	7668
GESAMTLÄNGE LENGTE LONGUEUR TOTALE TOTAL LENGTH 2*)	mm	3947
BAGGERGRÖSSE GRAAFMACHINE KLASSE EXCAVATRICE APPLICABLE APPLICABLE EXCAVATOR	t	65~75
ÖLFLUSS OLIESTROOM DÉBIT D'HUILE WORKING OIL FLOW	l/min	360~420
BAGGER-EINSTELLDRIK STEL DRUK GRAAFMACHINE PRESSIEN DE L'EXCAVATEUR SET PRESSURE EXCAVATOR	bar	350
BETRIEBSDRUK WERKDRUK PRESSIEN DE FONCTIONNEMENT OPERATING PRESSURE	bar	280~300
SCHLAGFREQUENZ SLAGFREQUENTIE FRÉQUENCE D'IMPACT IMPACT RATE	bpm	90~120
WERKZEUGDURCHMESSER BEITEL DIAMETER DIAMÈTRE DU BURIN CHISEL DIAMETER	mm	215
WERKZEUGLÄNGE BEITEL LENGTE LONGUEUR DU BURIN CHISEL LENGTH	mm	1800
SCHLAUCHANSCHLUSS SLANG AANSLUITING DIAMÈTRE DU TUYAU HOSE DIAMETER 10*)	inch	1 1/2
KOLBENSPEICHERDRUK ZUIGERACCUMULATOR DRUK PRESSIEN ACCUMULATEUR PISTON N2 PRESSURE (BACK HEAD)	bar	32~35
AKKUMULATORDRUK ACCUMULATOR DRUK PRESSIEN ACCUMULATEUR N2 PRESSURE (ACCUMULATOR)	bar	75~80
SCHALL 85DB(A)-ENTFERNUNG GELUID 85DB(A)-AFSTAND BRUIT 85DB(A)-DISTANCE NOISE 85DB(A)-DISTANCE	m	50~55
LOCHMUSTER GATENPATROON MODÈLE DE TROUS HOLE PATTERN		AC14
SCHRAUBENGROESSE BOUTGROOTTE TAILLE DE BOULON BOLT SIZE		M36
SCHMIERSYSTEM SMEERSYSTEEM SYSTÈME DE LUBRIFICATION AUTOMATIQUE AUTOMATIC GREASING SYSTEM		5*)
KABELLOSER DATENTRACKER DRAADLOZE GEGEVENSTRACKER TRACEURS DE DONNÉES SANS FIL WIRELESS DATA TRACKER		standard

1*) ARBEITSGEWICHT kann je nach Ausführung abweichen | GEWICHT Kan afhankelijk van de uitvoering afwijken | POIDS Peut varier selon l'exécution | WORKING WEIGHT may vary depending on the version 2*) GESAMTLÄNGE mit Meißel | TOTAALLENTE met beitel | LONGUEUR TOTALE avec burin | TOTAL LENGTH with Chisel

3*) MINI B@LUBE SCHMIERSYSTEM optional | MINI B@LUBE SMEERSYSTEEM optioneel | MINI B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE optionnel | MINI B@LUBE AUTOMATIC GREASING SYSTEM optional

4*) B@LUBE SCHMIERSYSTEM standard | B@LUBE SMEERSYSTEEM standaard | B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE standard | B@LUBE AUTOMATIC GREASING SYSTEM standard

5*) BI-B@LUBE SCHMIERSYSTEM standard | BI-B@LUBE SMEERSYSTEEM standaard | BI-B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE standard | BI-B@LUBE AUTOMATIC GREASING SYSTEM standard



ACDE® Europe

Netherlands ☎ +31 316 267291

Niederlande ☎ +31 6 53150283

Switzerland ☎ +41 625880164


Schweiz ☎ +41 793649583

✉ info@acde-europe.com

🌐 www.acde-europe.com



ADVANCED CONSTRUCTION & DEMOLITION EQUIPMENT



LB

BEILITE® EUROPE BLTB-220-5-W

HYDRAULIKHAMMER | HYRAULISCHE HAMER | MARTEAU HYDRAULIQUE | HYDRAULIC HAMMER



standard
BI-B@LUBE



standard
B@TRACK&CHECK

Deutsch | Nederlands | Français | English

GESAMTGEWICHT WERKGEWICHT POIS EN ORDRE DE MARCHÉ WORKING WEIGHT 1*)	kg	9365
GESAMTLÄNGE LENGTE LONGUEUR TOTALE TOTAL LENGTH 2*)	mm	4134
BAGGERGRÖSSE GRAAFMACHINE KLASSE EXCAVATRICE APPLICABLE APPLICABLE EXCAVATOR	t	68-85
ÖLFLUSS OLIESTROOM DÉBIT D'HUILE WORKING OIL FLOW	l/min	390-450
BAGGER-EINSTELLDRUCK STEL DRUK GRAAFMACHINE PRESSION DE L'EXCAVATEUR SET PRESSURE EXCAVATOR	bar	350
BETRIEBSDRUCK WERKDRUK PRESSION DE FONCTIONNEMENT OPERATING PRESSURE	bar	300-330
SCHLAGFREQUENZ SLAGFREQUENTIE FRÉQUENCE D'IMPACT IMPACT RATE	bpm	80-110
WERKZEUGDURCHMESSER BEITEL DIAMETER DIAMÈTRE DU BURIN CHISEL DIAMETER	mm	220
WERKZEUGLÄNGE BEITEL LENGTE LONGUEUR DU BURIN CHISEL LENGTH	mm	1900
SCHLAUCHANSCHLUSS SLANG AANSLUITING DIAMÈTRE DU TUYAU HOSE DIAMETER 10*)	inch	1 1/2
KOLBENSPEICHERDRUCK ZUIGERACCUMULATOR DRUCK PRESSION ACCUMULATEUR PISTON N2 PRESSURE (BACK HEAD)	bar	32-35
AKKUMULATORDRUCK ACCUMULATOR DRUCK PRESSION ACCUMULATEUR N2 PRESSURE (ACCUMULATOR)	bar	75-80
SCHALL 85DB(A)-ENTFERNUNG GELUID 85DB(A)-AFSTAND BRUIT 85DB(A)-DISTANCE NOISE 85DB(A)-DISTANCE	m	55-60
LOCHMUSTER GATENPATROON MODÈLE DE TROUS HOLE PATTERN		AC15
SCHRAUBENGROESSE BOUTGROOTTE TAILLE DE BOULON BOLT SIZE		M36
SCHMIERSYSTEM SMEERSYSTEEM SYSTÈME DE LUBRIFICATION AUTOMATIQUE AUTOMATIC GREASING SYSTEM		5*)
KABELLOSER DATENTRACKER DRAADLOZE GEGEVENSTRACKER TRACEURS DE DONNÉES SANS FIL WIRELESS DATA TRACKER		standard

1*) ARBEITSGEWICHT kann je nach Ausführung abweichen | GEWICHT Kan afhankelijk van de uitvoering afwijken | POIDS Peut varier selon l'exécution | WORKING WEIGHT may vary depending on the version 2*) GESAMTLÄNGE mit Meißel | TOTAALLENGTE met beitel | LONGUEUR TOTALE avec burin | TOTAL LENGTH with Chisel
3*) MINI B@LUBE SCHMIERSYSTEM optional | MINI B@LUBE SMEERSYSTEEM optioneel | MINI B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE optionnel | MINI B@LUBE AUTOMATIC GREASING SYSTEM optional
4*) B@LUBE SCHMIERSYSTEM standard | B@LUBE SMEERSYSTEEM standaard | B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE standard | B@LUBE AUTOMATIC GREASING SYSTEM standard
5*) BI-B@LUBE SCHMIERSYSTEM standard | BI-B@LUBE SMEERSYSTEEM standaard | BI-B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE standard | BI-B@LUBE AUTOMATIC GREASING SYSTEM standard

ACDE® Europe
Netherlands ☎ +31 316 267291
Niederlande ☎ +31 6 53150283
Switzerland ☎ +41 625880164
Schweiz ☎ +41 793649583




info@acde-europe.com
www.acde-europe.com

ADVANCED CONSTRUCTION & DEMOLITION EQUIPMENT

LB

BEILITE® EUROPE BLTB-230-5-W

HYDRAULIKHAMMER | HYRAULISCHE HAMER | MARTEAU HYDRAULIQUE | HYDRAULIC HAMMER

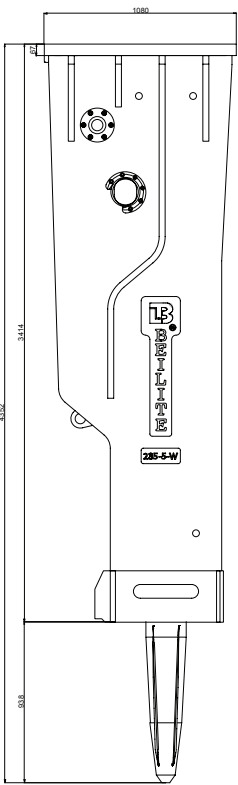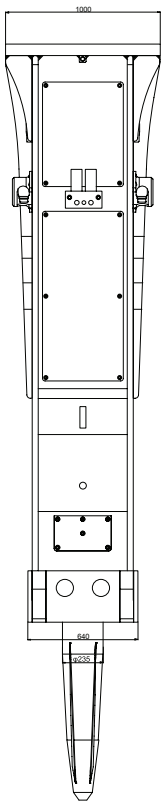

standard
BI-B@LUBE



standard
B@TRACK&CHECK


Deutsch | Nederlands | Francais | English

GESAMTGEWICHT WERKGEWICHT POIS EN ORDRE DE MARCHÉ WORKING WEIGHT 1*)	kg	10033
GESAMTLÄNGE LENGTE LONGUEUR TOTALE TOTAL LENGTH 2*)	mm	4312
BAGGERGRÖSSE GRAAFMACHINE KLASSE EXCAVATRICE APPLICABLE APPLICABLE EXCAVATOR	t	75-100
ÖLFLUSS OLIESTROOM DÉBIT D'HUILE WORKING OIL FLOW	l/min	420~480
BAGGER-EINSTELLDRIK STEL DRUK GRAAFMACHINE PRESSIEN DE L'EXCAVATEUR SET PRESSURE EXCAVATOR	bar	350
BETRIEBSDRUK WERKDRUK PRESSIEN DE FONCTIONNEMENT OPERATING PRESSURE	bar	300~330
SCHLAGFREQUENZ SLAGFREQUENTIE FRÉQUENCE D'IMPACT IMPACT RATE	bpm	80~110
WERKZEUGDURCHMESSER BEITEL DIAMETER DIAMÈTRE DU BURIN CHISEL DIAMETER	mm	230
WERKZEUGLÄNGE BEITEL LENGTE LONGUEUR DU BURIN CHISEL LENGTH	mm	1950
SCHLAUCHANSCHLUSS SLANG AANSLUITING DIAMÈTRE DU TUYAU HOSE DIAMETER 10*)	inch	1,5
KOLBENSPEICHERDRUK ZUIGERACCUMULATOR DRUK PRESSIEN ACCUMULATEUR PISTON N2 PRESSURE (BACK HEAD)	bar	32~35
AKKUMULATORDRUK ACCUMULATOR DRUK PRESSIEN ACCUMULATEUR N2 PRESSURE (ACCUMULATOR)	bar	75~80
SCHALL 85DB(A)-ENTFERNUNG GELUID 85DB(A)-AFSTAND BRUIT 85DB(A)-DISTANCE NOISE 85DB(A)-DISTANCE	m	60~65
LOCHMUSTER GATENPATROON MODÈLE DE TROUS HOLE PATTERN		AC15
SCHRAUBENGROESSE BOUTGROOTTE TAILLE DE BOULON BOLT SIZE		M36
SCHMIERSYSTEM SMEERSYSTEEM SYSTÈME DE LUBRIFICATION AUTOMATIQUE AUTOMATIC GREASING SYSTEM		5*)
KABELLOSER DATENTRACKER DRAADLOZE GEGEVENSTRACKER TRACEURS DE DONNÉES SANS FIL WIRELESS DATA TRACKER		standard

1*) ARBEITSGEWICHT kann je nach Ausführung abweichen | GEWICHT Kan afhankelijk van de uitvoering afwijken | POIDS Peut varier selon l'exécution | WORKING WEIGHT may vary depending on the version 2*) GESAMTLÄNGE mit Meißel | TOTAALLENGTE met beitel | LONGUEUR TOTALE avec burin | TOTAL LENGTH with Chisel 3*) MINI B@LUBE SCHMIERSYSTEM optional | MINI B@LUBE SMEERSYSTEEM optioneel | MINI B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE optionnel | MINI B@LUBE AUTOMATIC GREASING SYSTEM optional 4*) B@LUBE SCHMIERSYSTEM standard | B@LUBE SMEERSYSTEEM standaard | B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE standard | B@LUBE AUTOMATIC GREASING SYSTEM standard 5*) BI-B@LUBE SCHMIERSYSTEM standard | BI-B@LUBE SMEERSYSTEEM standaard | BI-B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE standard | BI-B@LUBE AUTOMATIC GREASING SYSTEM standard






ACDE® Europe
Netherlands ☎ +31 316 267291
Niederlande ☎ +31 6 53150283
Switzerland ☎ +41 625880164
Schweiz ☎ +41 793649583
info@acde-europe.com
www.acde-europe.com





BEILITE® EUROPE BLTB-235-5-W

HYDRAULIKHAMMER | HYRAULISCHE HAMER | MARTEAU HYDRAULIQUE | HYDRAULIC HAMMER

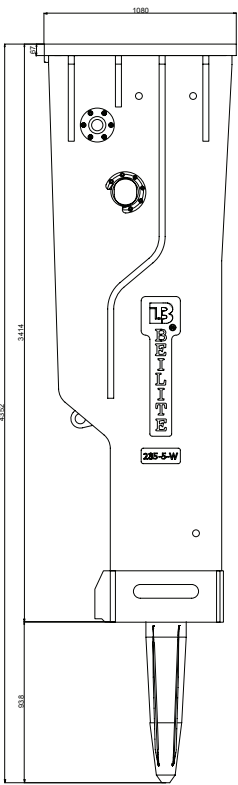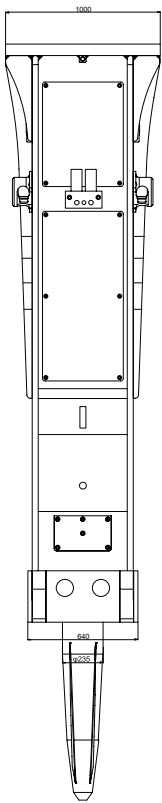

standard
BI-B@LUBE



standard
B@TRACK&CHECK


Deutsch | Nederlands | Français | English

GESAMTGEWICHT WERKGEWICHT POIS EN ORDRE DE MARCHÉ WORKING WEIGHT 1*)	kg	10207
GESAMTLÄNGE LENGTE LONGUEUR TOTALE TOTAL LENGTH 2*)	mm	4352
BAGGERGRÖSSE GRAAFMACHINE KLASSE EXCAVATRICE APPLICABLE APPLICABLE EXCAVATOR	t	75-100
ÖLFLUSS OLIESTROOM DÉBIT D'HUILE WORKING OIL FLOW	l/min	420-480
BAGGER-EINSTELLDRIK STEL DRUK GRAAFMACHINE PRESSION DE L'EXCAVATEUR SET PRESSURE EXCAVATOR	bar	350
BETRIEBSDRUCK WERKDRUK PRESSION DE FONCTIONNEMENT OPERATING PRESSURE	bar	300-330
SCHLAGFREQUENZ SLAGFREQUENTIE FRÉQUENCE D'IMPACT IMPACT RATE	bpm	80-110
WERKZEUGDURCHMESSER BEITEL DIAMETER DIAMÈTRE DU BURIN CHISEL DIAMETER	mm	235
WERKZEUGLÄNGE BEITEL LENGTE LONGUEUR DU BURIN CHISEL LENGTH	mm	1950
SCHLAUCHANSCHLUSS SLANG AANSLUITING DIAMÈTRE DU TUYAU HOSE DIAMETER 10*)	inch	1 1/2
KOLBENSPEICHERDRUCK ZUIGERACCUMULATOR DRUCK PRESSION ACCUMULATEUR PISTON N2 PRESSURE (BACK HEAD)	bar	32-35
AKKUMULATORDRUCK ACCUMULATOR DRUCK PRESSION ACCUMULATEUR N2 PRESSURE (ACCUMULATOR)	bar	75-80
SCHALL 85DB(A)-ENTFERNUNG GELUID 85DB(A)-AFSTAND BRUIT 85DB(A)-DISTANCE NOISE 85DB(A)-DISTANCE	m	75-80
LOCHMUSTER GATENPATROON MODÈLE DE TROUS HOLE PATTERN		AC15
SCHRAUBENGROESSE BOUTGROOTTE TAILLE DE BOULON BOLT SIZE		M36
SCHMIERSYSTEM SMEERSYSTEEM SYSTÈME DE LUBRIFICATION AUTOMATIQUE AUTOMATIC GREASING SYSTEM		5*)
KABELLOSER DATENTRACKER DRAADLOZE GEGEVENSTRACKER TRACEURS DE DONNÉES SANS FIL WIRELESS DATA TRACKER		standard

1*) ARBEITSGEWICHT kann je nach Ausführung abweichen | GEWICHT Kan afhankelijk van de uitvoering afwijken | POIDS Peut varier selon l'exécution | WORKING WEIGHT may vary depending on the version 2*) GESAMTLÄNGE mit Meißel | TOTAALLENGTE met beitel | LONGUEUR TOTALE avec burin | TOTAL LENGTH with Chisel 3*) MINI B@LUBE SCHMIERSYSTEM optional | MINI B@LUBE SMEERSYSTEEM optioneel | MINI B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE optionnel | MINI B@LUBE AUTOMATIC GREASING SYSTEM optional 4*) B@LUBE SCHMIERSYSTEM standard | B@LUBE SMEERSYSTEEM standaard | B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE standard | B@LUBE AUTOMATIC GREASING SYSTEM standard 5*) BI-B@LUBE SCHMIERSYSTEM standard | BI-B@LUBE SMEERSYSTEEM standaard | BI-B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE standard | BI-B@LUBE AUTOMATIC GREASING SYSTEM standard





ACDE® Europe
Netherlands ☎ +31 316 267291
Niederlande ☎ +31 6 53150283
Switzerland ☎ +41 625880164
Schweiz ☎ +41 793649583
info@acde-europe.com
www.acde-europe.com
EDA OPEN S





BEILITE® EUROPE BLTB-245-5-W

HYDRAULIKHAMMER | HYDRAULISCHE HAMER | MARTEAU HYDRAULIQUE | HYDRAULIC HAMMER

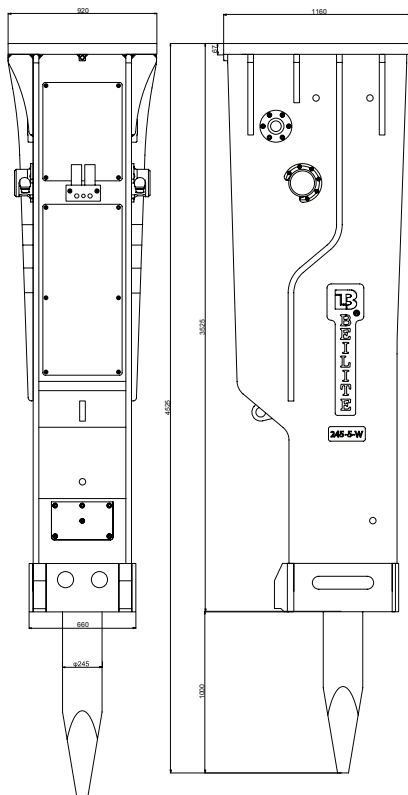

standard
BI-B@LUBE



standard
B@TRACK&CHECK

Deutsch | Nederlands | Français | English

GESAMTGEWICHT WERKGEWICHT POIS EN ORDRE DE MARCHÉ WORKING WEIGHT 1*)	kg	10598
GESAMTLÄNGE LENGTE LONGUEUR TOTALE TOTAL LENGTH 2*)	mm	4525
BAGGERGRÖSSE GRAAFMACHINE KLASSE EXCAVATRICE APPLICABLE APPLICABLE EXCAVATOR	t	90-130
ÖLFLUSS OLIESTROOM DÉBIT D'HUILE WORKING OIL FLOW	l/min	450-550
BAGGER-EINSTELLDRUCK STEL DRUK GRAAFMACHINE PRESSION DE L'EXCAVATEUR SET PRESSURE EXCAVATOR	bar	350
BETRIEBSDRUCK WERKDRUK PRESSION DE FONCTIONNEMENT OPERATING PRESSURE	bar	300-330
SCHLAGFREQUENZ SLAGFREQUENTIE FRÉQUENCE D'IMPACT IMPACT RATE	bpm	70-100
WERKZEUGDURCHMESSER BEITEL DIAMETER DIAMÈTRE DU BURIN CHISEL DIAMETER	mm	245
WERKZEUGLÄNGE BEITEL LENGTE LONGUEUR DU BURIN CHISEL LENGTH	mm	2050
SCHLAUCHANSCHLUSS SLANG AANSLUITING DIAMÈTRE DU TUYAU HOSE DIAMETER 10*)	inch	1 1/2
KOLBENSPEICHERDRUCK ZUIGERACCUMULATOR DRUCK PRESSION ACCUMULATEUR PISTON N2 PRESSURE (BACK HEAD)	bar	32-35
AKKUMULATORDRUCK ACCUMULATOR DRUCK PRESSION ACCUMULATEUR N2 PRESSURE (ACCUMULATOR)	bar	75-80
SCHALL 85DB(A)-ENTFERNUNG GELUID 85DB(A)-AFSTAND BRUIT 85DB(A)-DISTANCE NOISE 85DB(A)-DISTANCE	m	75-80
LOCHMUSTER GATENPATROON MODÈLE DE TROUS HOLE PATTERN		AC15
SCHRAUBENGROSSE BOUTGROOTTE TAILLE DE BOULON BOLT SIZE		M36
SCHMIERSYSTEM SMEERSYSTEEM SYSTÈME DE LUBRIFICATION AUTOMATIQUE AUTOMATIC GREASING SYSTEM		5*)
KABELLOSER DATENTRACKER DRAADLOZE GEGEVENSTRACKER TRACEURS DE DONNÉES SANS FIL WIRELESS DATA TRACKER		standard

1*) ARBEITSGEWICHT kann je nach Ausführung abweichen | GEWICHT Kan afhankelijk van de uitvoering afwijken | POIDS Peut varier selon l'exécution | WORKING WEIGHT may vary depending on the version 2*) GESAMTLÄNGE mit Meißel | TOTAALLENGTE met beitel | LONGUEUR TOTALE avec burin | TOTAL LENGTH with Chisel

3*) MINI B@LUBE SCHMIERSYSTEM optional | MINI B@LUBE SMEERSYSTEEM optioneel | MINI B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE optionnel | MINI B@LUBE AUTOMATIC GREASING SYSTEM optional

4*) B@LUBE SCHMIERSYSTEM standard | B@LUBE SMEERSYSTEEM standaard | B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE standard | B@LUBE AUTOMATIC GREASING SYSTEM standard

5*) BI-B@LUBE SCHMIERSYSTEM standard | BI-B@LUBE SMEERSYSTEEM standaard | BI-B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE standard | BI-B@LUBE AUTOMATIC GREASING SYSTEM standard



ACDE® Europe

Netherlands ☎ +31 316 267291


Niederlande ☎ +31 6 53150283

Switzerland ☎ +41 625880164

Schweiz ☎ +41 793649583

✉ info@acde-europe.com

🌐 www.acde-europe.com





ADVANCED CONSTRUCTION & DEMOLITION EQUIPMENT



BEILITE® EUROPE BLTB-260-5-W

HYDRAULIKHAMMER | HYDRAULISCHE HAMER | MARTEAU HYDRAULIQUE | HYDRAULIC HAMMER

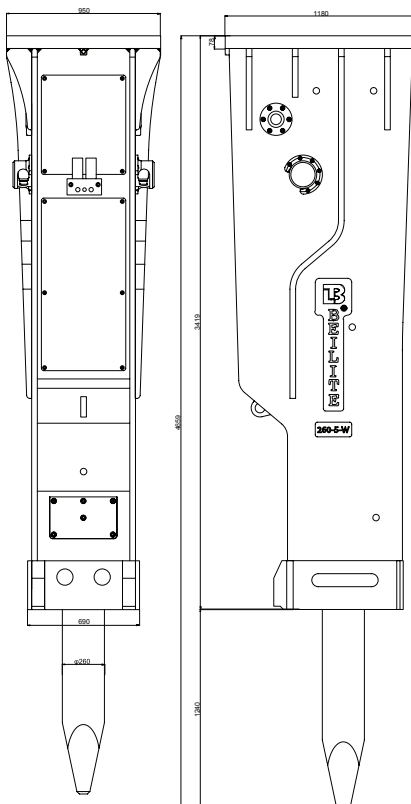

standard
BI-B@LUBE



standard
B@TRACK&CHECK

Deutsch | Nederlands | Français | English

GESAMTGEWICHT WERKGEWICHT POIS EN ORDRE DE MARCHÉ WORKING WEIGHT 1*)	kg	11566
GESAMTLÄNGE LENGTE LONGUEUR TOTALE TOTAL LENGTH 2*)	mm	4659
BAGGERGRÖSSE GRAAFMACHINE KLASSE EXCAVATRICE APPLICABLE APPLICABLE EXCAVATOR	t	90~160
ÖLFLUSS OLIESTROOM DÉBIT D'HUILE WORKING OIL FLOW	l/min	490~590
BAGGER-EINSTELLDRIK STEL DRUK GRAAFMACHINE PRESSIEN DE L'EXCAVATEUR SET PRESSURE EXCAVATOR	bar	350
BETRIEBSDRUK WERKDRUK PRESSIEN DE FONCTIONNEMENT OPERATING PRESSURE	bar	300~330
SCHLAGFREQUENZ SLAGFREQUENTIE FRÉQUENCE D'IMPACT IMPACT RATE	bpm	70~100
WERKZEUGDURCHMESSER BEITEL DIAMETER DIAMÈTRE DU BURIN CHISEL DIAMETER	mm	260
WERKZEUGLÄNGE BEITEL LENGTE LONGUEUR DU BURIN CHISEL LENGTH	mm	2200
SCHLAUCHANSCHLUSS SLANG AANSLUITING DIAMÈTRE DU TUYAU HOSE DIAMETER 10*)	inch	1 1/2
KOLBENSPEICHERDRUK ZUIGERACCUMULATOR DRUK PRESSIEN ACCUMULATEUR PISTON N2 PRESSURE (BACK HEAD)	bar	32~35
AKKUMULATORDRUK ACCUMULATOR DRUK PRESSIEN ACCUMULATEUR N2 PRESSURE (ACCUMULATOR)	bar	75~80
SCHALL 85DB(A)-ENTFERNUNG GELUID 85DB(A)-AFSTAND BRUIT 85DB(A)-DISTANCE NOISE 85DB(A)-DISTANCE	m	80~85
LOCHMUSTER GATENPATROON MODÈLE DE TROUS HOLE PATTERN		AC15
SCHRAUBENGROESSE BOUTGROOTTE TAILLE DE BOULON BOLT SIZE		M36
SCHMIERSYSTEM SMEERSYSTEEM SYSTÈME DE LUBRIFICATION AUTOMATIQUE AUTOMATIC GREASING SYSTEM		5*)
KABELLOSER DATENTRACKER DRAADLOZE GEGEVENSTRACKER TRACEURS DE DONNÉES SANS FIL WIRELESS DATA TRACKER		standard

1*) ARBEITSGEWICHT kann je nach Ausführung abweichen | GEWICHT Kan afhankelijk van de uitvoering afwijken | POIDS Peut varier selon l'exécution | WORKING WEIGHT may vary depending on the version 2*) GESAMTLÄNGE mit Meißel | TOTAALLENTE met beitel | LONGUEUR TOTALE avec burin | TOTAL LENGTH with Chisel

3*) MINI B@LUBE SCHMIERSYSTEM optional | MINI B@LUBE SMEERSYSTEEM optioneel | MINI B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE optionnel | MINI B@LUBE AUTOMATIC GREASING SYSTEM optional

4*) B@LUBE SCHMIERSYSTEM standard | B@LUBE SMEERSYSTEEM standaard | B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE standard | B@LUBE AUTOMATIC GREASING SYSTEM standard

5*) BI-B@LUBE SCHMIERSYSTEM standard | BI-B@LUBE SMEERSYSTEEM standaard | BI-B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE standard | BI-B@LUBE AUTOMATIC GREASING SYSTEM standard



ACDE® Europe

Netherlands ☎ +31 316 267291

Niederlande ☎ +31 6 53150283

Switzerland ☎ +41 625880164

Schweiz ☎ +41 793649583

✉ info@acde-europe.com


🌐 www.acde-europe.com



OPEN






ADVANCED CONSTRUCTION & DEMOLITION EQUIPMENT





BEILITE® EUROPE BLTB-280-5-W

HYDRAULIKHAMMER | HYDRAULISCHE HAMER | MARTEAU HYDRAULIQUE | HYDRAULIC HAMMER

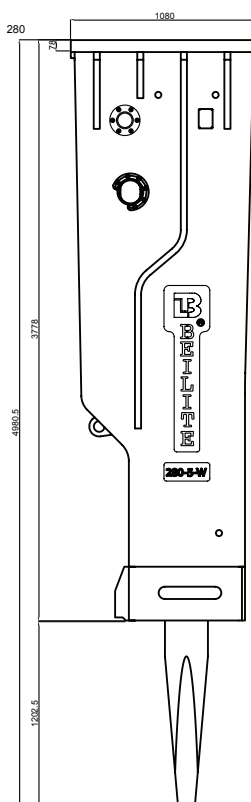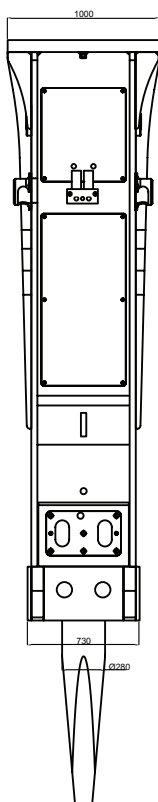

standard
BI-B@LUBE



standard
B@TRACK&CHECK

Deutsch | Nederlands | Français | English

GESAMTGEWICHT WERKGEWICHT POIS EN ORDRE DE MARCHÉ WORKING WEIGHT 1*)	kg	14039
GESAMTLÄNGE LENGTE LONGUEUR TOTALE TOTAL LENGTH 2*)	mm	4980
BAGGERGRÖSSE GRAAFMACHINE KLASSE EXCAVATRICE APPLICABLE APPLICABLE EXCAVATOR	t	120-200
ÖLFLUSS OLIESTROOM DÉBIT D'HUILE WORKING OIL FLOW	l/min	550-650
BAGGER-EINSTELLDRIK STEL DRUK GRAAFMACHINE PRESSION DE L'EXCAVATEUR SET PRESSURE EXCAVATOR	bar	350
BETRIEBSDRUCK WERKDRUK PRESSION DE FONCTIONNEMENT OPERATING PRESSURE	bar	300-330
SCHLAGFREQUENZ SLAGFREQUENTIE FRÉQUENCE D'IMPACT IMPACT RATE	bpm	60-90
WERKZEUGDURCHMESSER BEITEL DIAMETER DIAMÈTRE DU BURIN CHISEL DIAMETER	mm	280
WERKZEUGLÄNGE BEITEL LENGTE LONGUEUR DU BURIN CHISEL LENGTH	mm	2300
SCHLAUCHANSCHLUSS SLANG AANSLUITING DIAMÈTRE DU TUYAU HOSE DIAMETER 10*)	inch	1 1/2
KOLBENSPEICHERDRUCK ZUIGERACCUMULATOR DRUCK PRESSION ACCUMULATEUR PISTON N2 PRESSURE (BACK HEAD)	bar	35-38
AKKUMULATORDRUCK ACCUMULATOR DRUCK PRESSION ACCUMULATEUR N2 PRESSURE (ACCUMULATOR)	bar	75-80
SCHALL 85DB(A)-ENTFERNUNG GELUID 85DB(A)-AFSTAND BRUIT 85DB(A)-DISTANCE NOISE 85DB(A)-DISTANCE	m	80-85
LOCHMUSTER GATENPATROON MODÈLE DE TROUS HOLE PATTERN		AC15
SCHRAUBENGROESSE BOUTGROOTTE TAILLE DE BOULON BOLT SIZE		M36
SCHMIERSYSTEM SMEERSYSTEEM SYSTÈME DE LUBRIFICATION AUTOMATIQUE AUTOMATIC GREASING SYSTEM		5*)
KABELLOSER DATENTRACKER DRAADLOZE GEGEVENSTRACKER TRACEURS DE DONNÉES SANS FIL WIRELESS DATA TRACKER		standard

1*) ARBEITSGEWICHT kann je nach Ausführung abweichen | GEWICHT Kan afhankelijk van de uitvoering afwijken | POIDS Peut varier selon l'exécution | WORKING WEIGHT may vary depending on the version 2*) GESAMTLÄNGE mit Meißel | TOTAALLENGTE met beitel | LONGUEUR TOTALE avec burin | TOTAL LENGTH with Chisel

3*) MINI B@LUBE SCHMIERSYSTEM optional | MINI B@LUBE SMEERSYSTEEM optioneel | MINI B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE optionnel | MINI B@LUBE AUTOMATIC GREASING SYSTEM optional

4*) B@LUBE SCHMIERSYSTEM standard | B@LUBE SMEERSYSTEEM standaard | B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE standard | B@LUBE AUTOMATIC GREASING SYSTEM standard

5*) BI-B@LUBE SCHMIERSYSTEM standard | BI-B@LUBE SMEERSYSTEEM standaard | BI-B@LUBE SYSTÈME DE LUBRIFICATION AUTOMATIQUE standard | BI-B@LUBE AUTOMATIC GREASING SYSTEM standard



ACDE® Europe

Netherlands ☎ +31 316 267291

Niederlande ☎ +31 6 53150283

Switzerland ☎ +41 625880164

Schweiz ☎ +41 793649583


✉ info@acde-europe.com

🌐 www.acde-europe.com



EDA

OPEN S



ADVANCED CONSTRUCTION & DEMOLITION EQUIPMENT