

# ACDE





## EUROPE<sup>®</sup>

+31 (0)316-267291

info@acde-europe.com


www.acde-europe.com

ADVANCED CONSTRUCTION & DEMOLITION EQUIPMENT


-  Sloop- en sorteergrijper
-  Demolition and sorting grab
-  Abbruch- und Sortiergreifer
-  Grappin de Demolition et de triage

### S603-D


### HM1000 hole pattern

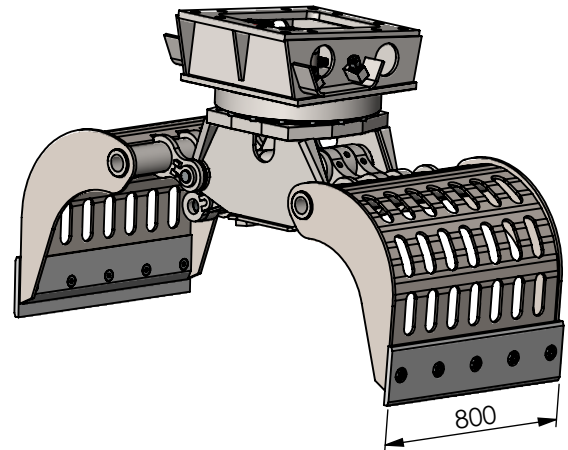


zijkant/side view/  
Seitenansicht/vue de côté

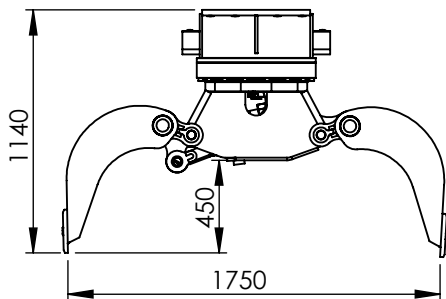

vooraanzicht/front view/  
Vorderansicht/vue de face

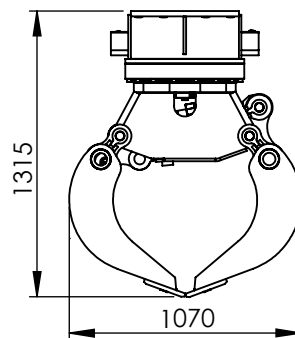

Gatenpatroon/hole pattern/  
Bohrbild/motif de trous

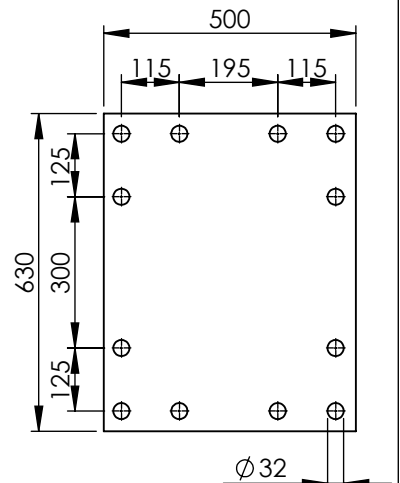

#### Technical specifications

| Nederlands  | English  | Deutsch  | Français  |       |       |
|--|---|--|--|-------|-------|
| Klasse graafmachine  | Class excavator   | Machine klasse   | Classe de excavatrice  | ton   | 10-16 |
| Gewicht  | Weight  | Gewicht  | Poids  | Kg    | 775   |
| Werkdruk max.  | Op. pressure max  | Betät. druck max   | Pression maximale  | bar   | 350   |
| Werkdruk rotatie max   | Op. pressure rotation max   | Betät. druck rotation max  | Pression rotation max  | bar   | 210   |
| Werkdruk rotatie min   | Op. pressure rotation min   | Betät. druck rotation min  | Pression rotation min  | bar   | 190   |
| Olieflow max   | Oil flow max  | Öfluss max   | Débit d'huile max  | l/min | 100   |
| Olieflow rotatie max   | Oil flow rotation max   | Öfluss rotation max  | Débit d'huile rotation max   | l/min | 25    |
| Inhoud   | Content   | Inhalt   | Contenance   | ltr.  | 400   |
| Sluitkracht  | Closing force   | Schliesskraft  | Force de fermeture   | kN    | 35    |
| Slangaansluiting knijpfunctie  | Hose connect open/close   | Schlauchanschluss kneifen  | Raccord de tuyau fermeture   | -     | \$20  |
| Slangaansluiting draaifunctie  | Hose connect turn function  | Schlauchanschluss drehen   | Raccord de tuyau rotation  | -     | \$16  |